

5 in 1 Dimmable LED Driver



www.richeelighting.com

8400-200W-12V-5

8400-200W-24V-5

Feature

- UL, cUL listed, Type HL rated.
- Universal AC input: 120-277VAC
- Built-in active PFC function, PF: up to 0.98(110v); up to 0.81(277v)
- Load: 10-100%
- Protection: short circuit/over loading/ Over temperature
- Full protection aluminium case, for dry, damp, wet location
- Flicker-free
- Triac/0-10V/1-10V/10V PWM/Potentiometer dimming
- Dimming range: 0.1-100%
- Fine tuning of output voltage.
- Installation: Flat mounting, Vertical mounting.
- Suitable for linear lighting, tape light, neon Light, profile and cabinet Lighting application.

8400-200W-24V-5



Class P



Technical Specs

	8400-200W-12V-5	8400-200W-24V-5
OUTPUT		
Output Voltage	12Vdc	24Vdc
Output Voltage Range	12Vdc±0.5Vdc	24Vdc±0.5Vdc
Output Current	16.6A Max	8.3A Max
Output Power	200W	
Output Ripple & Noise	≤600mV	
INPUT		
Input Voltage Range	110Vac-277Vac	
Input Frequency Range	50-60HZ	
Input Current	2.3A@110VAC	
Surge Current (cold start)	20A, 50%, 1.6ms @120Vac / 25A, 50%, 1.4ms @277Vac	
Power Efficiency	85% @220Vac	
PF	0.98@110Vac	
Leakage Current	<0.75mA	
PROTECTION		
Short-Circuit Protection	Hiccup Mode, and recover automatically	
Over-Voltage Protection	Shut down the output when non-load voltage ≥ 14 V, and recover automatically	Shut down the output when non-load voltage ≥ 28 V, and recover automatically
Over Temperature	100°C ± 10°C shut down voltage automatically recover after cooling	
ENVIRONMENT		
Working Temperature	-40°C ~ +60°C	
Working Humidity	20% ~ 90%RH	
Approved Enviroments Location	Suitable for Dry, Damp and Wet locations	
Storage Temperature	-40°C ~ +80°C	
Storage Humidity	10% ~ 95%RH	
Vibration	10-500Hz. 1.0mm. 15 minutes (for X, Y, Z each axis)	
Tcase	+90°C	

5 in 1 Dimmable LED Driver



www.richeelighting.com

SAFETY&EMC

Safety Standard	UL8750
Dielectric Strength (Hi-Pot)	I/P-O/P 1.88KVAC
	I/P-Case 1.88KVAC
Insulation Resistance	100MΩ/500VDC/25°C/70%RH
Grounding Resistance	≤0.5Ω

OTHERS




MTBF	200Khrs.MIL-HDBK-217F(25°C)
DIMMER COMPATIBILITY	Triac Dimmer LUTRON(DVLV-600P, DVCL-153P, PD-5NE, MAELV-600, DVELV-300P, PD-6WCL, RHCL453P, RCL-153PNL, CTCL-153P, MACL-153M, CTCL-153PD, STCL-153P, CTCL-150), LEVITON(DSL06-P32L, No. 06672, No.06674), LEGRAND(PH703PTU, ADTH703TU, LECL-153P), For more dimmer models, pls refer to the list of compatible dimmers.
Minimum load available for Dimming (Use DVCL-153P)	5%
LIFE TIME	50,000 hours at Tc ≤ 80°C maximum case hot spot temperature
Dimensions	254*132*46mm / 10"x5.19x1.81"(L*W*H)
Weight	1.75kg
Outer Box Specifications	290*287*275mm / 11.42"x11.3"x10.83"(L*W*H) / 10pcs/ctn
	Total 2 layer, each layer 5 pcs / G.W19.65kg / N.W18.15kg(1±10%)

Remarks:

Test environment temperature : 25 ± 2°C;
 Ripple and noise measurement methods: terminal to parallel 47uF electrolytic capacity and 0.1uF ceramic capacity, in 20 MHZ Bandwidth measurement.
 "The driver is suitable for connecting resistor current-limiting LED fixture (e.g. LED strip). The inrush current will be dozens of times increased if connecting built-in constant current IC current-limiting LED fixtures, the driver will activate the overloaded protection (hiccups flickering)."

Profile Drawing

Unit:inch&mm

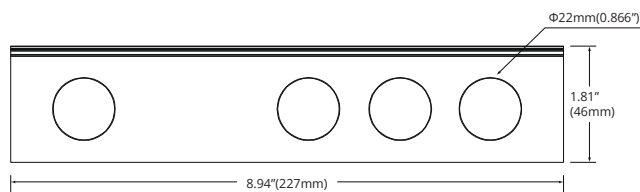
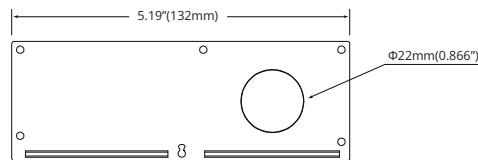
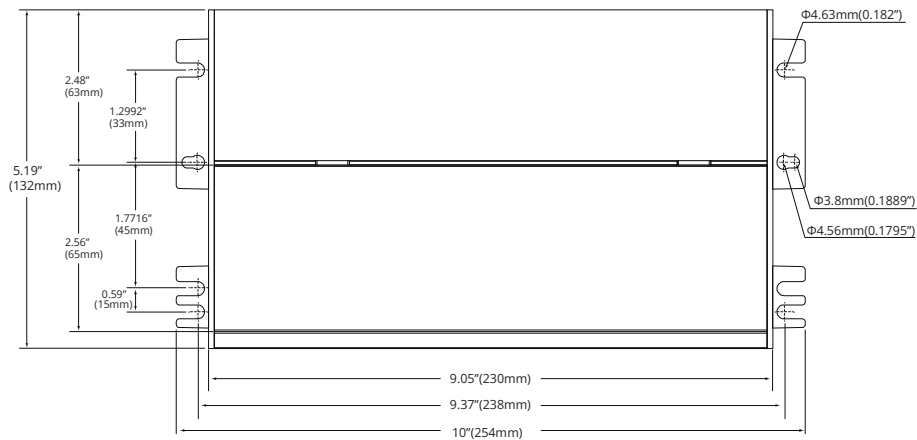


5 in 1 Dimmable LED Driver




www.richeelighting.com

Wiring Diagram

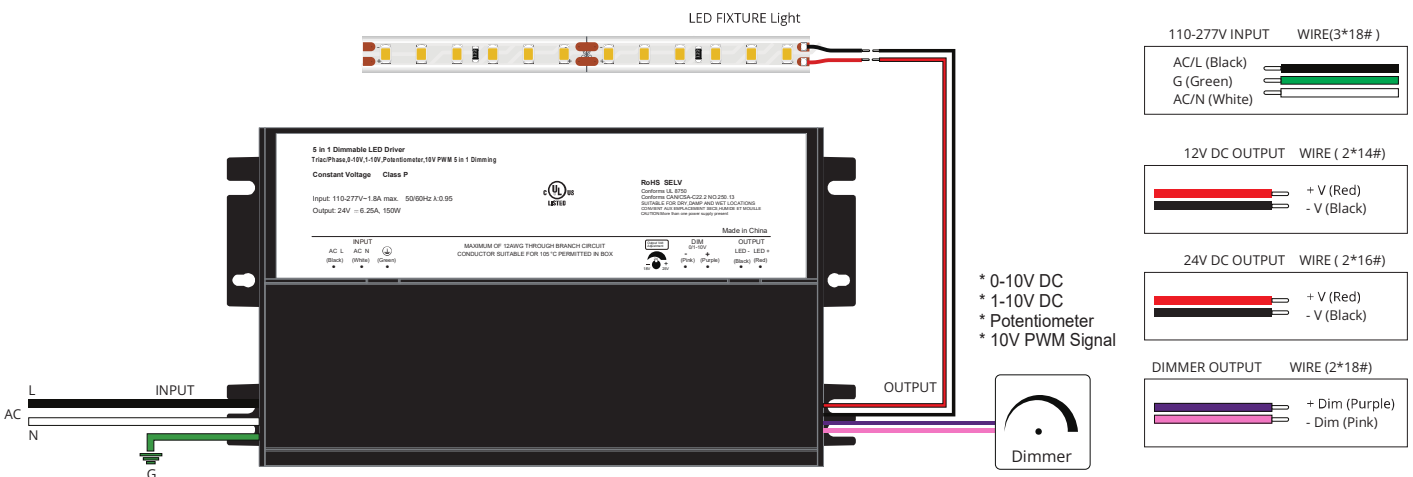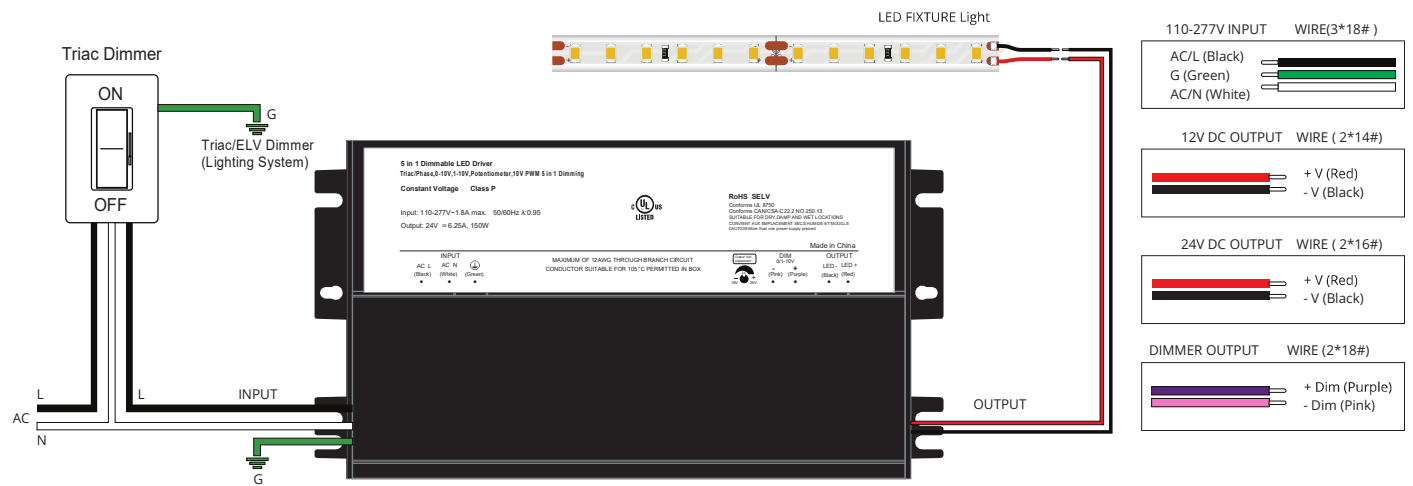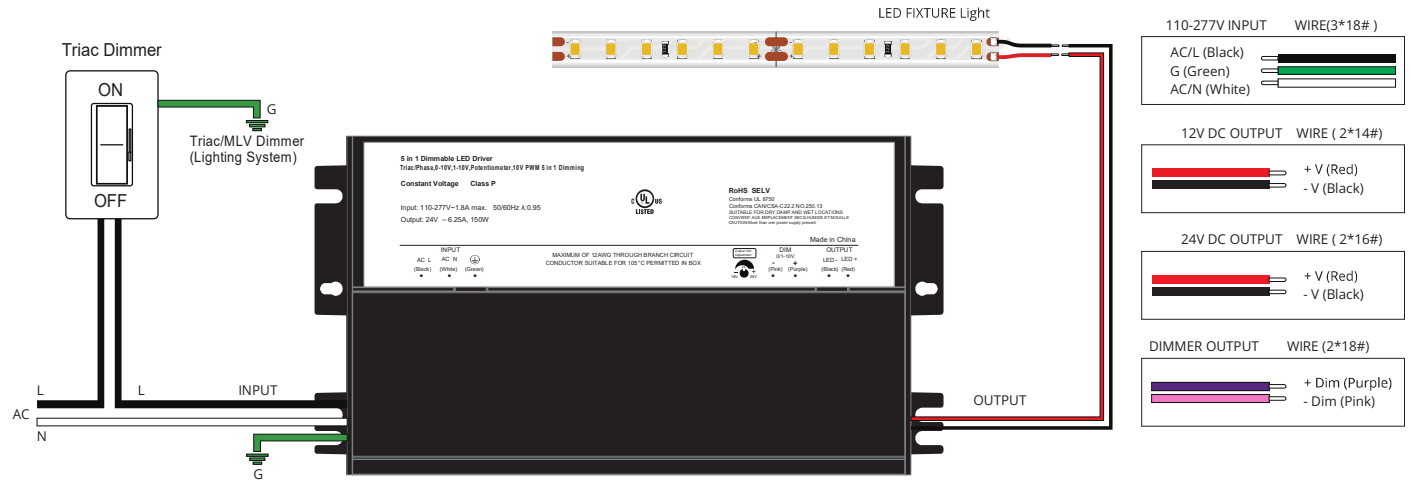


5 in 1 Dimmable LED Driver

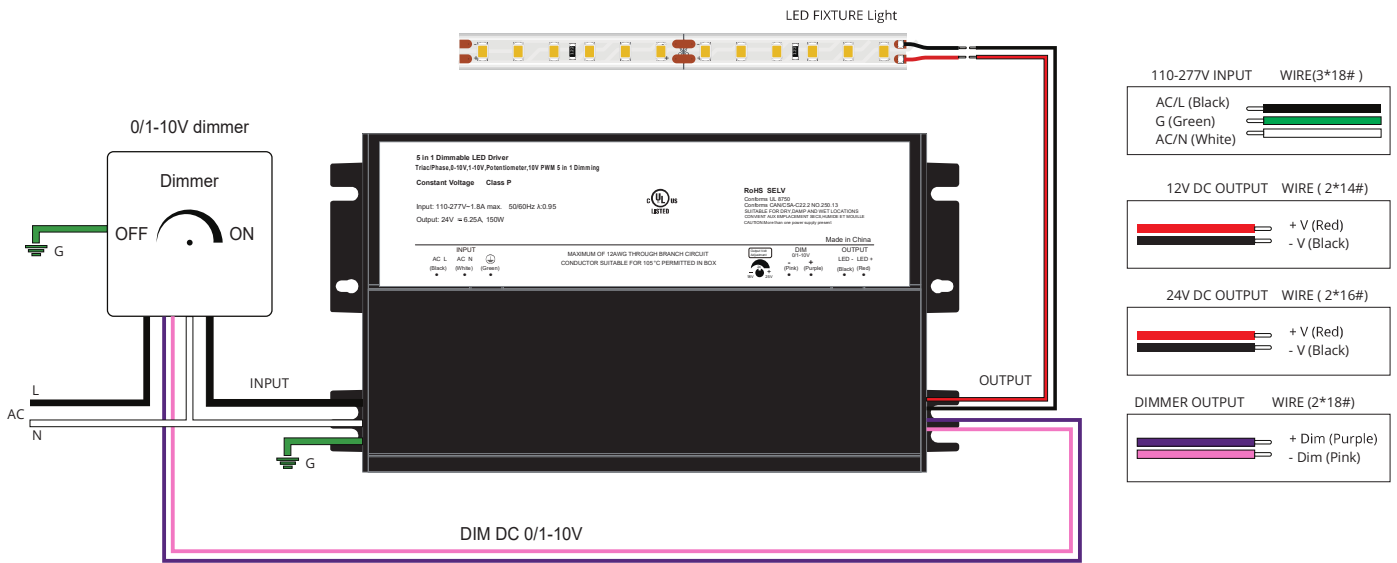

Derating Curve

※ To extend their life, please refer to the Derating Curve and derate according to the temperature.

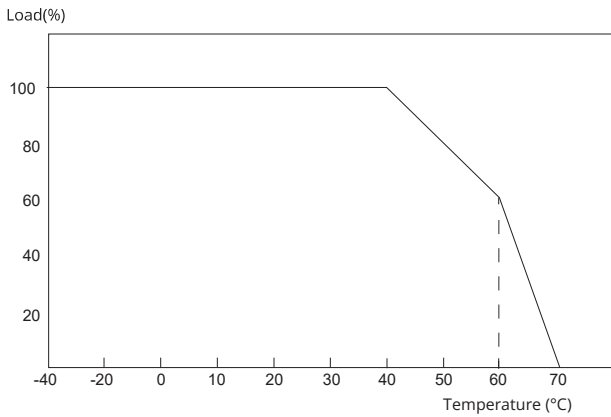

Attentions

- Please ensure that the ground wire is properly grounded and ensure it does not come into contact with the neutral wire.
- Please make the power supply installed in a well-ventilated place, to ensure that the environment temperature is appropriate.
- Do not overload the power supply with multiple appliances.
- Please do not touch the metal shell surface to avoid high temperature scald.
- Do not install in the minefield or high pressure area.
- Do not attempt to repair privately. Please contact the supplier if you have any questions.

Tips

- To be installed by a certified electrician. Please read and follow the instructions carefully before installing. Ensure all contact points are connected firmly.
- Please pay attention to the using environment, and conduct regular check and maintenance to eliminate safety risks.