




INDOOR LED FLEXIBLE STRIP 6394 MINI 4.5MM MILKY SERIES



B E T T E R L I G H T I N G C O N S I S T E N C Y



NO VOLTAGE DROP

24.6 feet ultra-long connection with no voltage drop,
No brightness difference from head to end

SOFT LIGHT

Better lighting consistency, no light dots



SMOOTH LINE STRIP


No solder joints on PCB board. Elegant and clean design.



ULTRA-NARROW

Suitable for indoor applications, tight spaces, and intricate designs.


4.5mm



3mm

APPLICATION

Widely used in hotels, shopping malls, furniture, cabinets, shelf, as decoration lighting, direct lighting or indirect lighting.

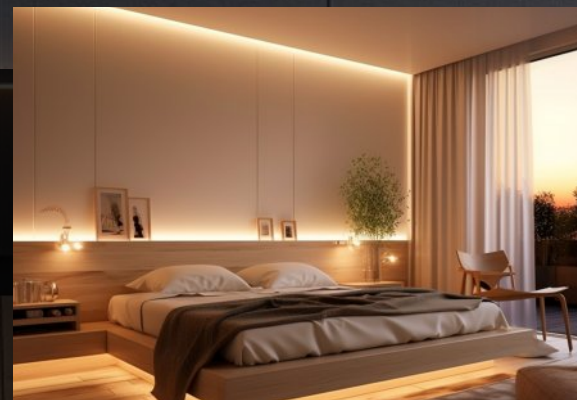

SPECIFICATIONS

Model	CCT	Lumens (lm/ft)	LEDs/m	Rated Watt	Lumen (lm/W)	LED Type	Beam Angle	CRI	Voltage (V DC)	Max. Length	Cutting Points	PCB Width	Reel Length	Compatible Dimming Methods	IP
6394-30K-24V-CRI90-Milky-4.5mm	3000K	198	280	2.2W/ft	90	2219	130	90	24	24.6ft (7.5m)	1.97in (50mm)	0.18in (4.5mm)	16.4ft(5m)	PWM	40
6394-30K-24V-CRI90-Milky-50-4.5mm	3000K	198											49.2ft(15m)		

DIMENSIONS (Unit: mm/inch)

