

6474 3-Wire Dual CCT Smooth Line Strip

1800K~ 6500K



Smooth lighting

Smaller cutting units, smaller SMD1515 LED chips, denser LED chip arrangement, and smoother light-emitting effect

480
LEDs/m

1.3_{inch} / **33.33**_{mm}
Cutting Points



75-105

LM/W
CRI90

1800K-6500K

CCT adjustable

Soft light

Soft light, dot free, linear light,
extremely flexible, high reliability.



3-Wire Dual-CCT

From warm yellow soft light to cool white bright light, adjust between 1800K~6500K freely! Flexibly fits multiple scenarios such as office, makeup, and photography, meeting diverse scenario needs at once.



1800K

Relaxing, warm, sleep-friendly, cozy home atmosphere.



3500K

Natural and soft, neither warm nor cool, universally suitable for multiple scenarios.





6500K

High brightness enhances concentration, reduces eye strain, suitable for long-hour work.

More Flexible & Slim


Only 10×3.5mm, suitable for space-constrained installation scenarios, enabling ultra-thin and miniaturized design. Fits complex shapes (curved/special-shaped) with a sleek look, matching diverse decors.

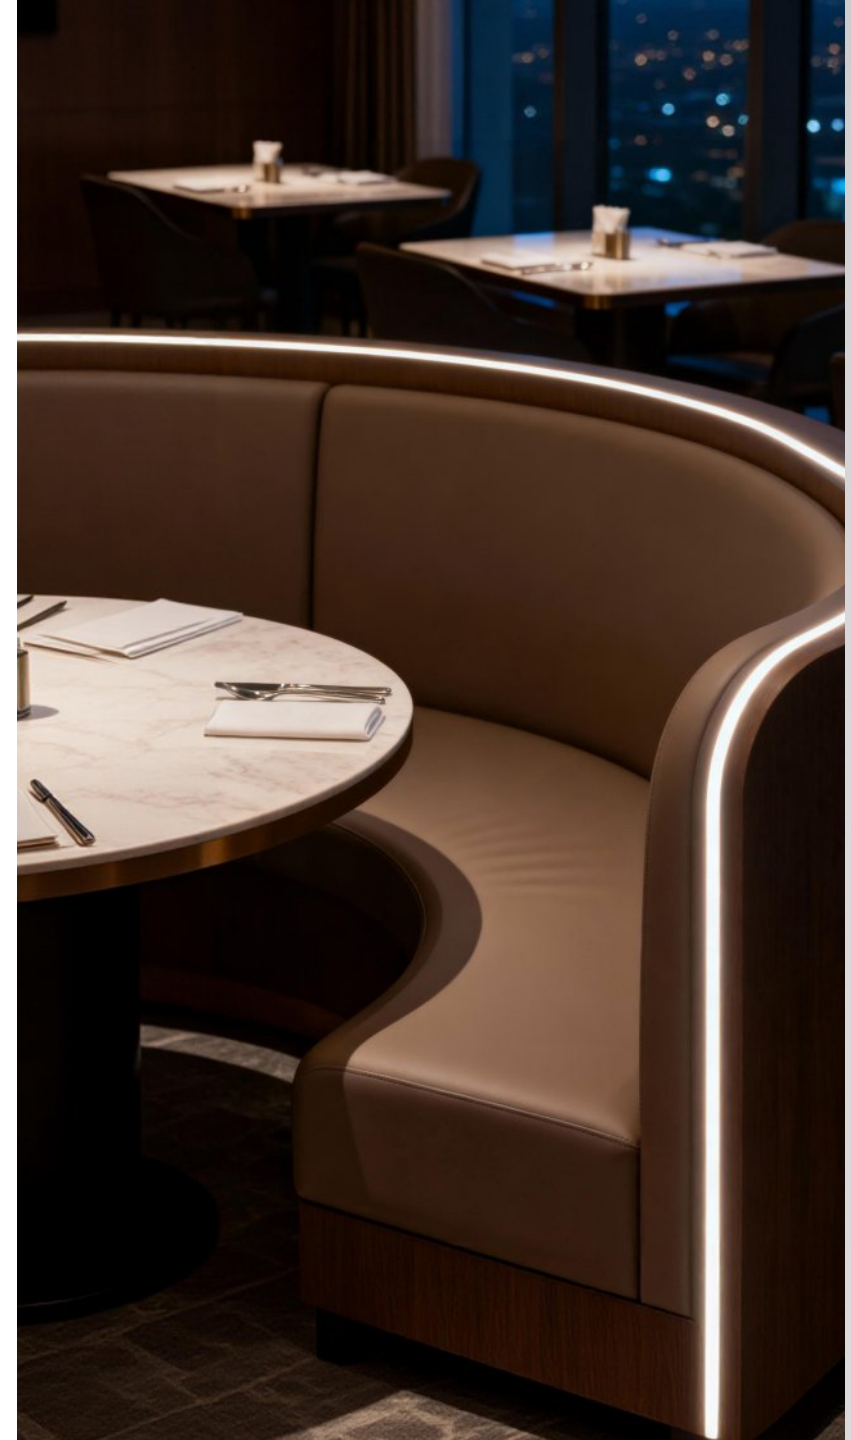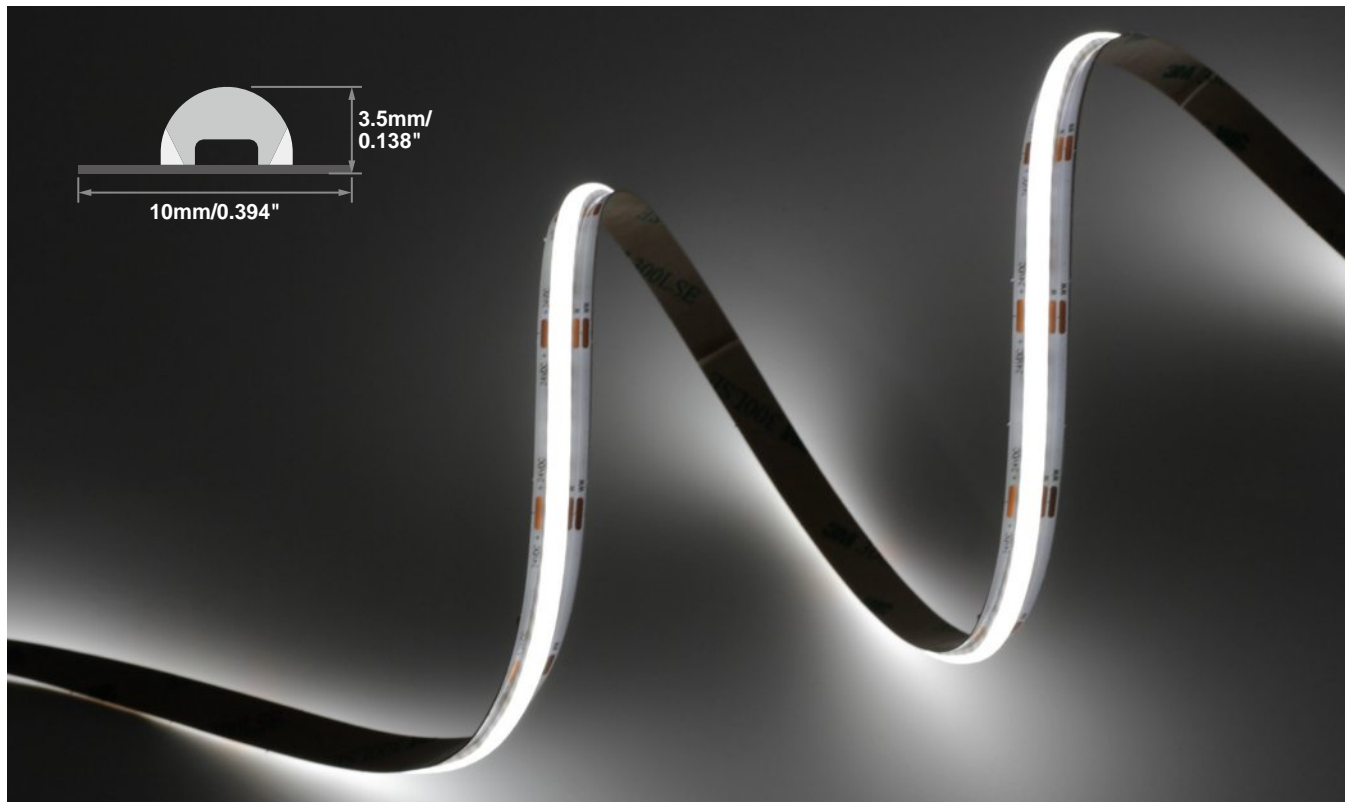

OPTIONAL CONNECTORS

Board to Board

Wire to board

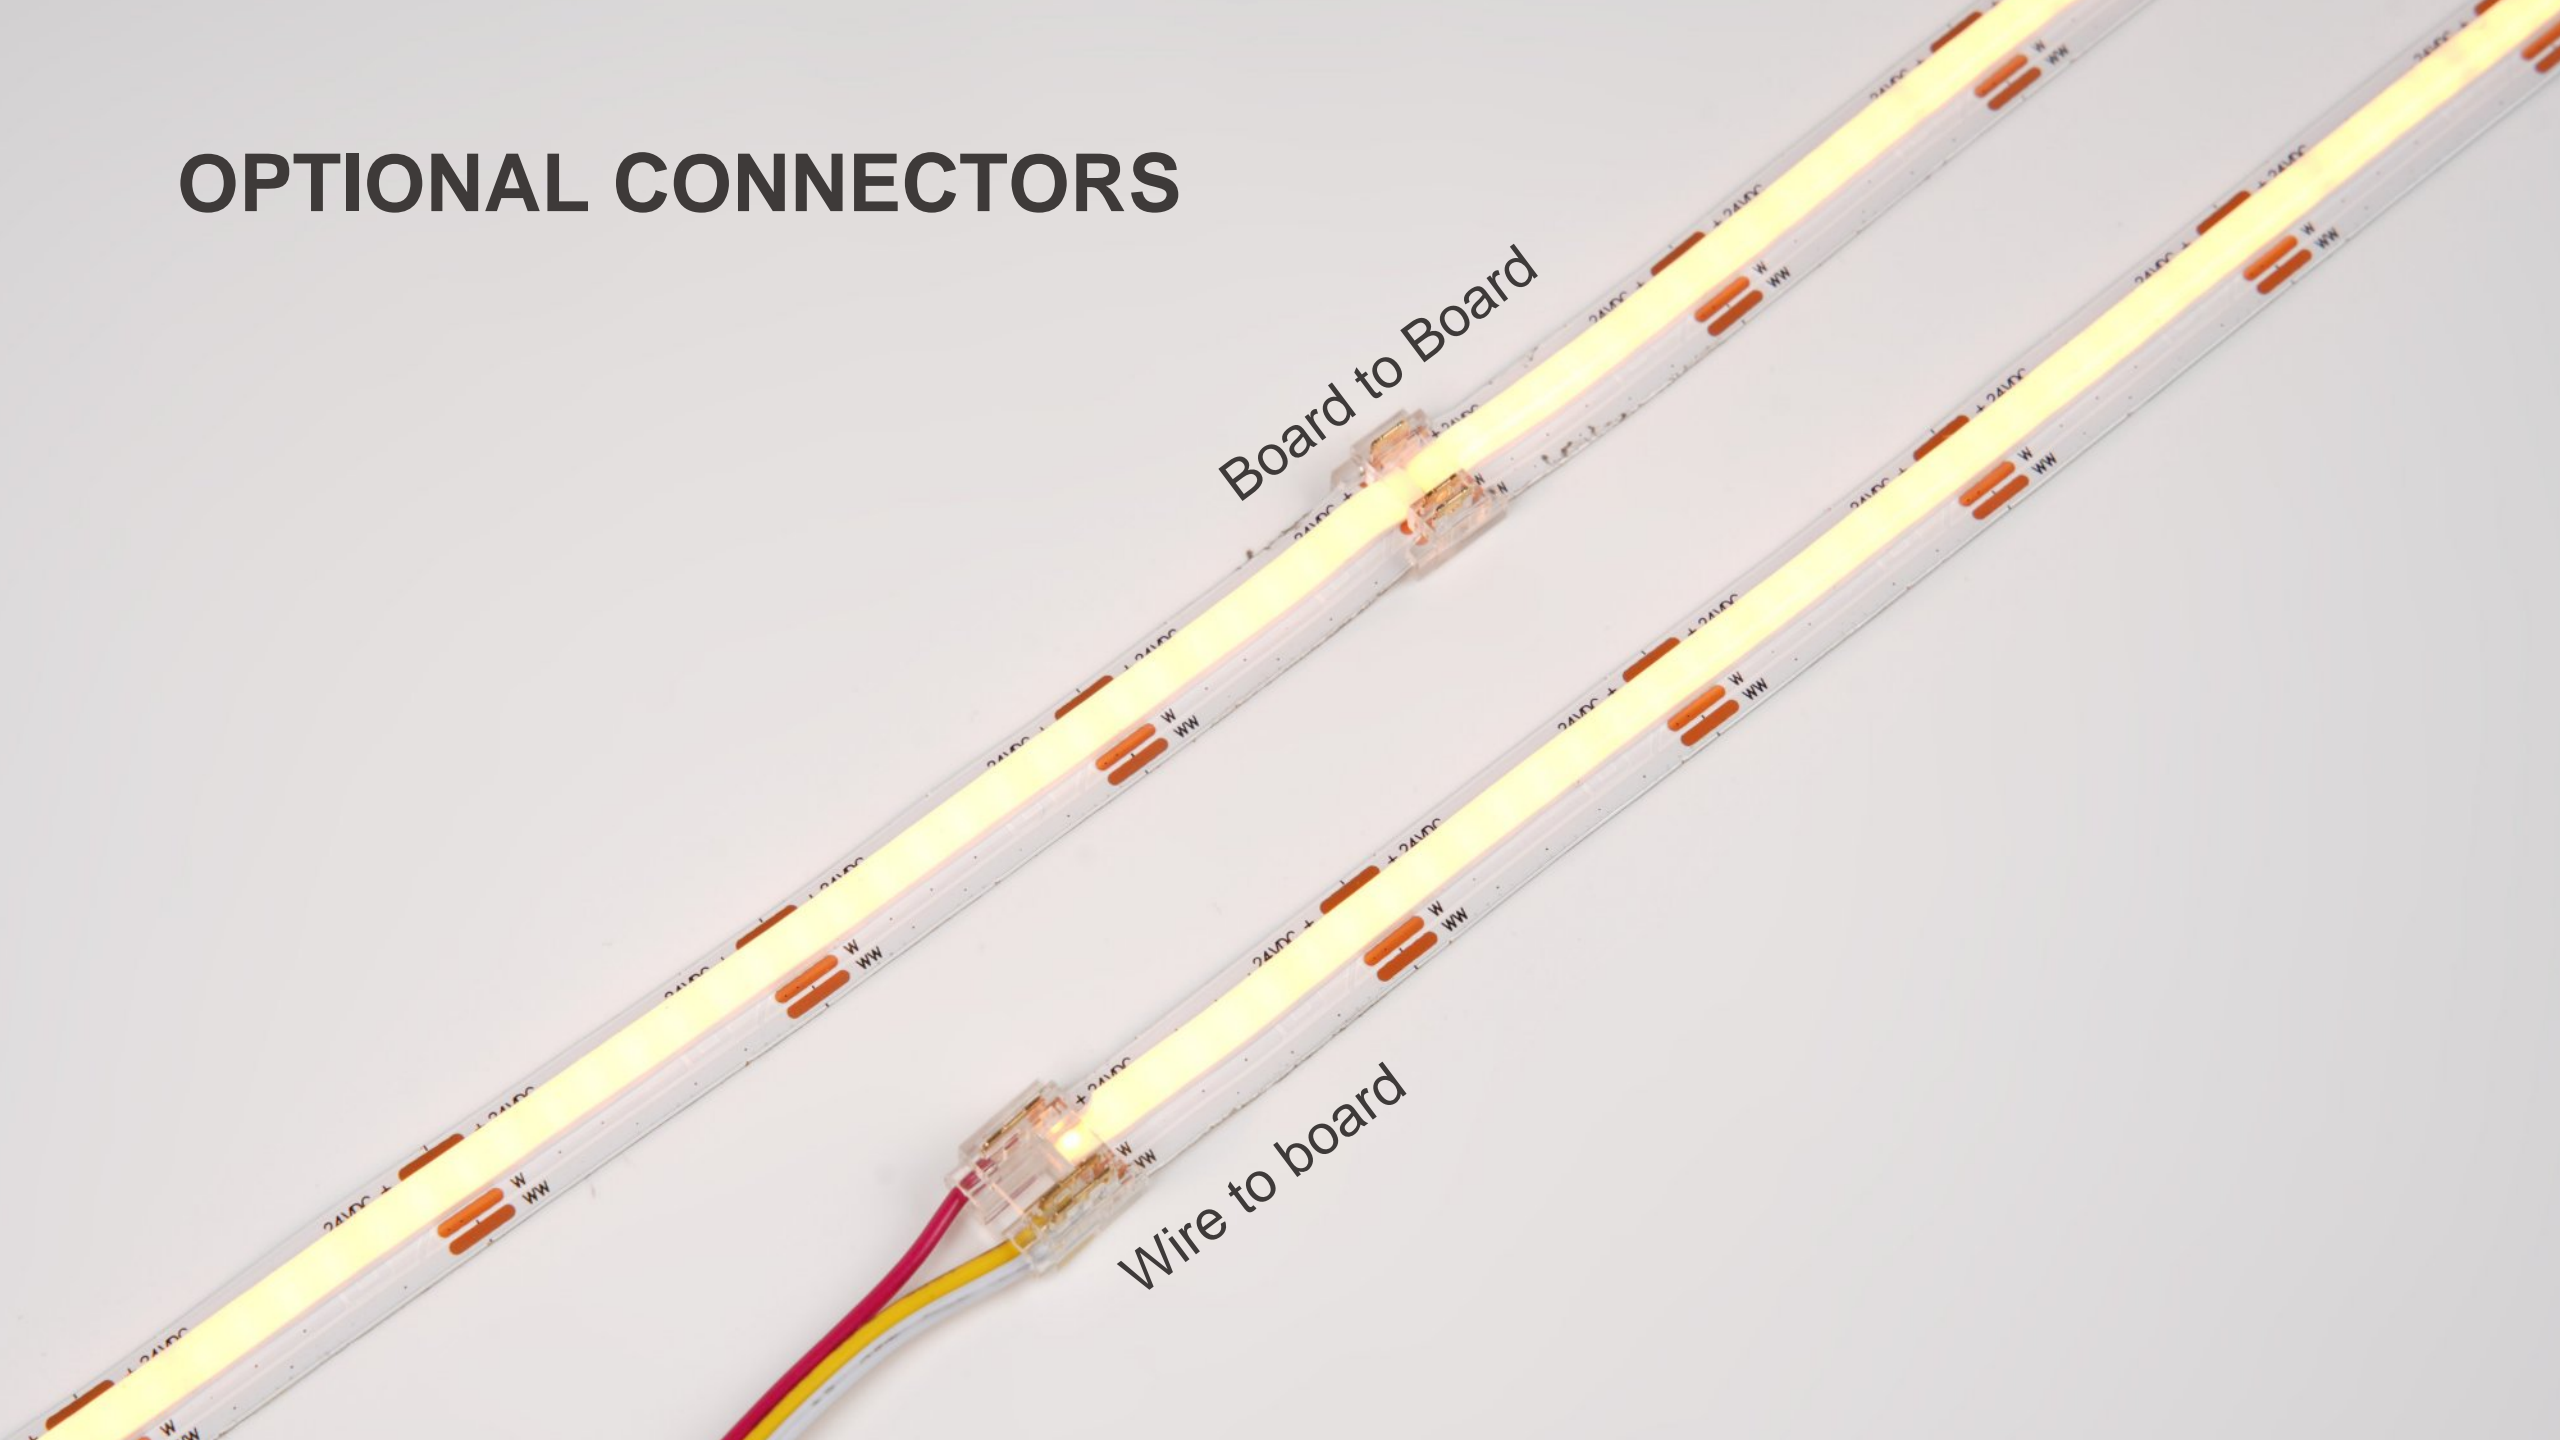



APPLICATION

Widely used in hotels, shopping malls, furniture, cabinets, shelves, as decoration lighting, direct lighting or indirect lighting.




SPECIFICATIONS

Model	CCT	Lumens (lm/ft)	LEDs/m	Rated Watt	Lumen LM/W	LED Type	Beam Angle	CRI	Voltage (V DC)	Max. Length	Cutting Points	PCB Width	Reel Length	IP	Compatible Dimming Methods	Ambient Temp	
6474-18K/65K-COB-24V-CRI90	1800±100K	225	240	3W/FT	75	1515	135	90	24	16.4ft(5m)	1.31in (33.33mm)	0.394in (10mm)	16.4ft(5m)	IP40	PWM/0-10V/1-10V/DALI/DMX	-20°C to 45°C	
	6500±500K	315	240		105												
6474-18K/65K-COB-24V-CRI90-50	1800±100K	225	240	3W/FT	75	1515	135	90	24	16.4ft(5m)	1.31in (33.33mm)	0.394in (10mm)	49.2ft (15m)	IP40		PWM/0-10V/1-10V/DALI/DMX	-20°C to 45°C
	6500±500K	315	240		105												

DIMENSIONS (Unit: mm/inch)

6474-18K/65K-COB-24V-CRI90

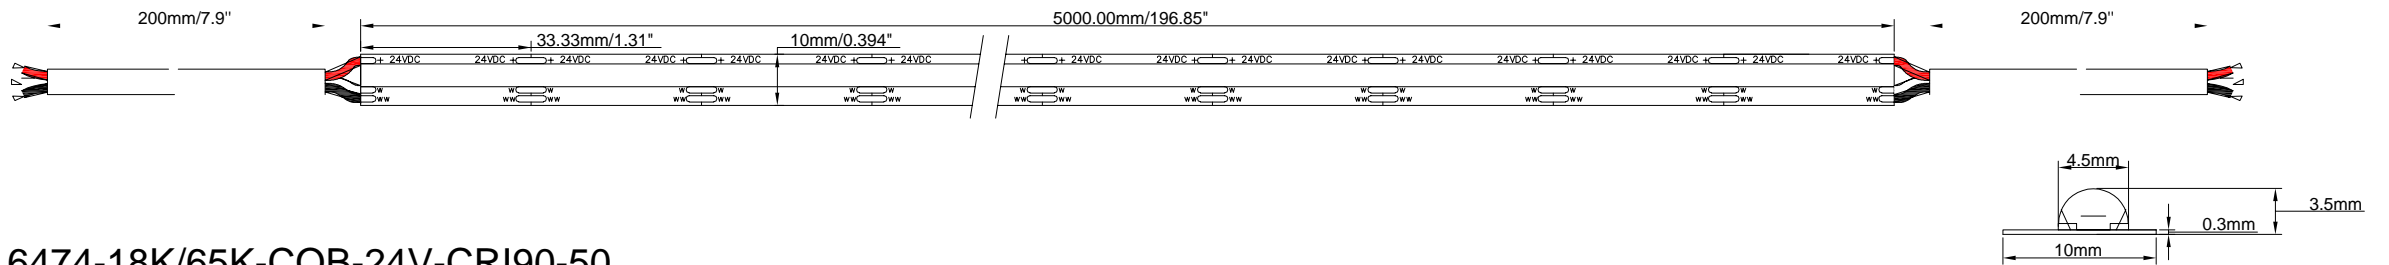

6474-18K/65K-COB-24V-CRI90-50

