

LED Underground Light




Separation design for lampbody and embedded part

Stainless Steel Frame (316/304/201)


Epistar COB with high efficiency reflector

Aluminum embedded part

Item No	1712
LED Power	3W
Total Power	3.2W
Input Voltage	DC12V
LED Efficiency	100-110LM/W
Luminous Flux Output	220lm--250lm
CCT	3000K-6500K
Operating Temperature	-10~50°C
Storage Temperature	25°C
Product Size	Φ58*H90mm
Cut-out	Φ48mm
Material	Aluminum Alloy + Stainless Steel
Color	High Light / grey
Beam Angle	24°/60°
CRI	75
IP Rate	IP65
LED Spec. LED	COB
LED Brand	EPISTAR
Life Span	30000 hours
Guarantee	2 yea
Packaging	6.5X6.5X120cm/ctn

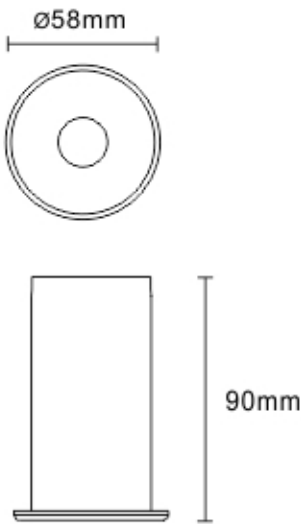

PHOTOMETRIC TEST REPORT

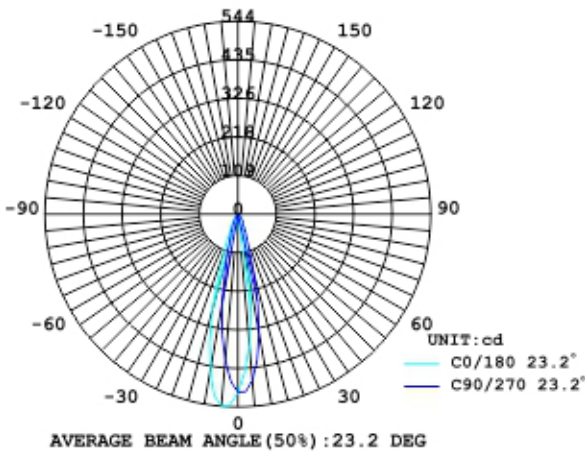

Height	AVG. E	CENTER E	Diameter
1.00m	374.73lx	503.30lx	39.30cm
2.00m	93.68lx	125.82lx	79.60cm
3.00m	41.64lx	55.92lx	119.49cm
4.00m	23.42lx	31.46lx	157.99cm
5.00m	14.99lx	19.13lx	197.49cm