

Extreme simplicity

LED Down Light 3" 10W

LED DOWN LIGHT




10W ALU+PC

Product feature

- ◆ Adopted high quality Hongli LED with CRI 80. lumens of natural white up to 870Lm, and of warm white up to 780Lm.
- ◆ CE/EMC/LVD/SAA/C-tick approved built-in driver with PFC>0.9, easy for installation.
- ◆ Full range color temperature 2700K, 3000K, 4000K, 5000K and 6000K for wide selection.
- ◆ FITTING COLOR OPTIONS:
White, Satin Nickel, chrome etc.



Model Number	Power Consumption	LED	CRI	Efficiency (lm/W)	Color Temperature	Beam Angle	Input Voltage	PFC	Light Intensity	Lumens	Dimmable
4620-WWW 4620-WW	10W	SMD	80	78	2700±200K 3000±200K	90°	100-240VAC	>0.9	380 cd	780lm	NO
4620-NW	10W	SMD	80	83	4000±200K	90°	100-240VAC	>0.9	410 cd	830lm	NO
4620-NCW 4620-CW	10W	SMD	80	87	5000±200K 6000±200K	90°	100-240VAC	>0.9	450 cd	870lm	NO

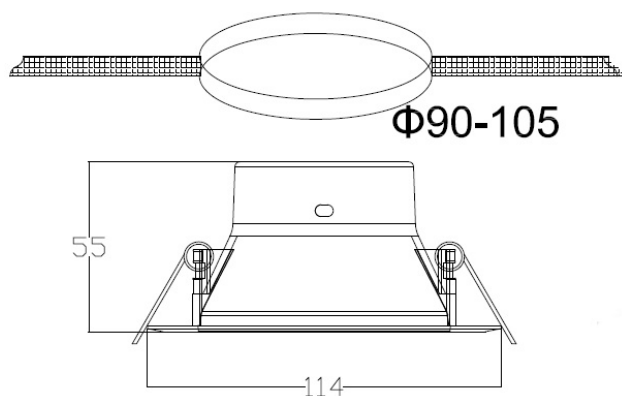

Application

- Area: Indoor use only.
- Purpose: Accent lighting, local lighting.
- General lighting
- Hotel
- Hall / Lobby
- Jewelry store
- Theater
- BAR/Restaurant
- Store
- Art gallery
- Museum
- School



Extreme simplicity

LED Down Light 3" 10W

General characteristics

Model Number	Product name	Material	Driver	IP Rating	Dimension (mm)	Cut size(mm)	Net Weight	Lifetime (hr)	Working Temperature
4620-XX	LED Down Light	Aluminum + PC	Internal	IP40	Φ114x55	90-105	280g	25000	-5℃ ~ +35℃





Packaging information

Packing: 42 PCS / carton		
Box	125×125×95(mm)	280 g
Carton	62×39×30(cm)	10.00 kg



4620-WW 90°

4620-NCW 90°

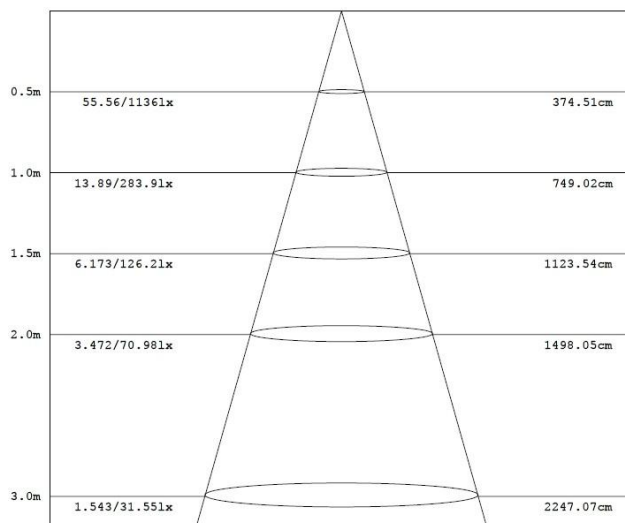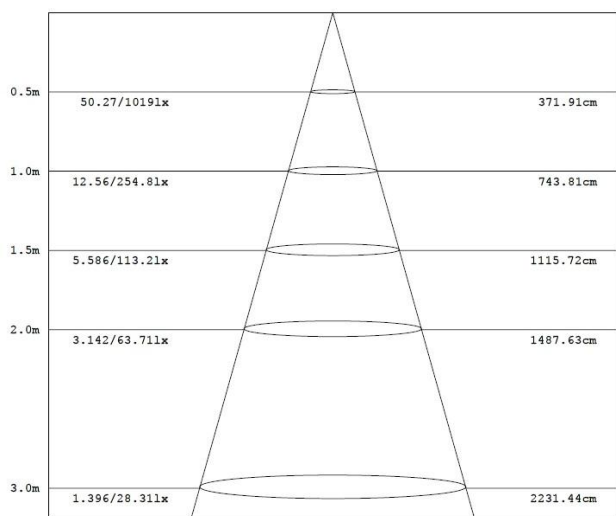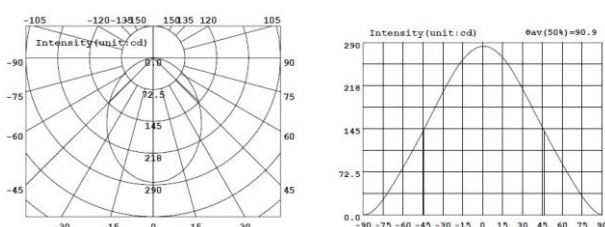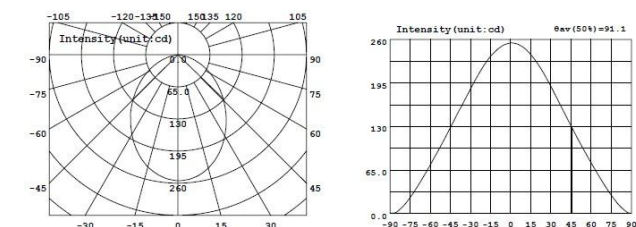

Height

Lux

Diameter

Height

Lux

Diameter



Installation instruction



Cut a suitable hole in ceiling → connect power cord well → insert down light → release spring clasp



Important Caution

1. Not suitable for high temperature and moisture area.
2. Not suitable for heavy air-polluted area.
3. Not suitable for close system fixture.

