






**Bezels
Exchangeable**

Only
7mm
Thick









Easy Installation
Surface Mounted +
Recessed Mounted

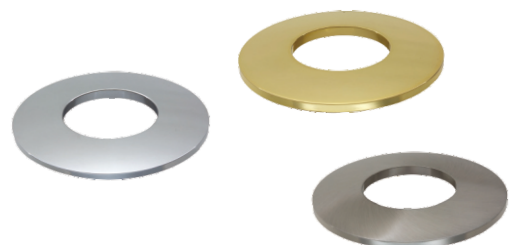

Model: 4122



Features



Bezels



White



Black



Satin Nickle




Silver




Gold


Specification

Mechanical




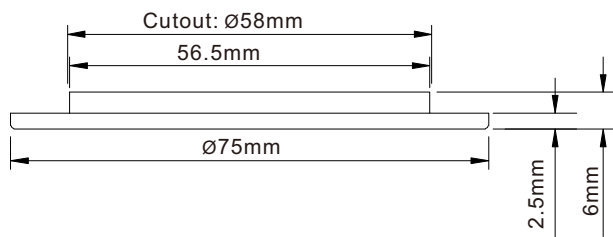



Without mounting ring, recessed mounted

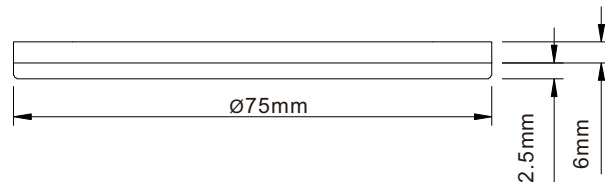


With mounting ring, surface mounted



Bezel

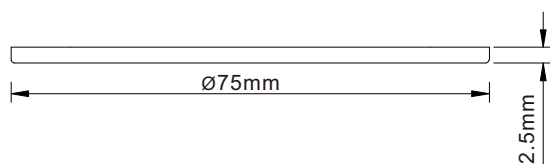

Mounting ring

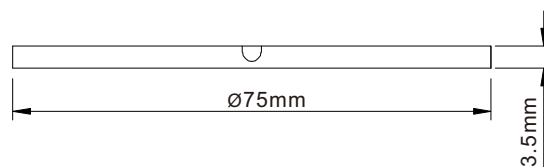


General


Color Temperature (K)	3000K	4000K	6000K
Power Consumption (W)	DC12V 2.2W		
Input Voltage (Vac)	12V DC		
Power Factor	>0.85		
Light Source	4014 SMD LED		
Lumen (lm)	180 @3000K	200 @4000K	210@6000K
CRI (Ra)	>80		
Beam Angle (°)	120		
Material	Aluminum + PMMA		
IP Grade	21		
Operation Temperature Ta (°C)	Max Ta=45		
Lifespan(hours)	>36,000		
Dimming	Optional, Triac dimmer / Quality LED intelligent control system		
Tilttable	not tilttable		
Certification	CE		

Installation

Recessed Mounted

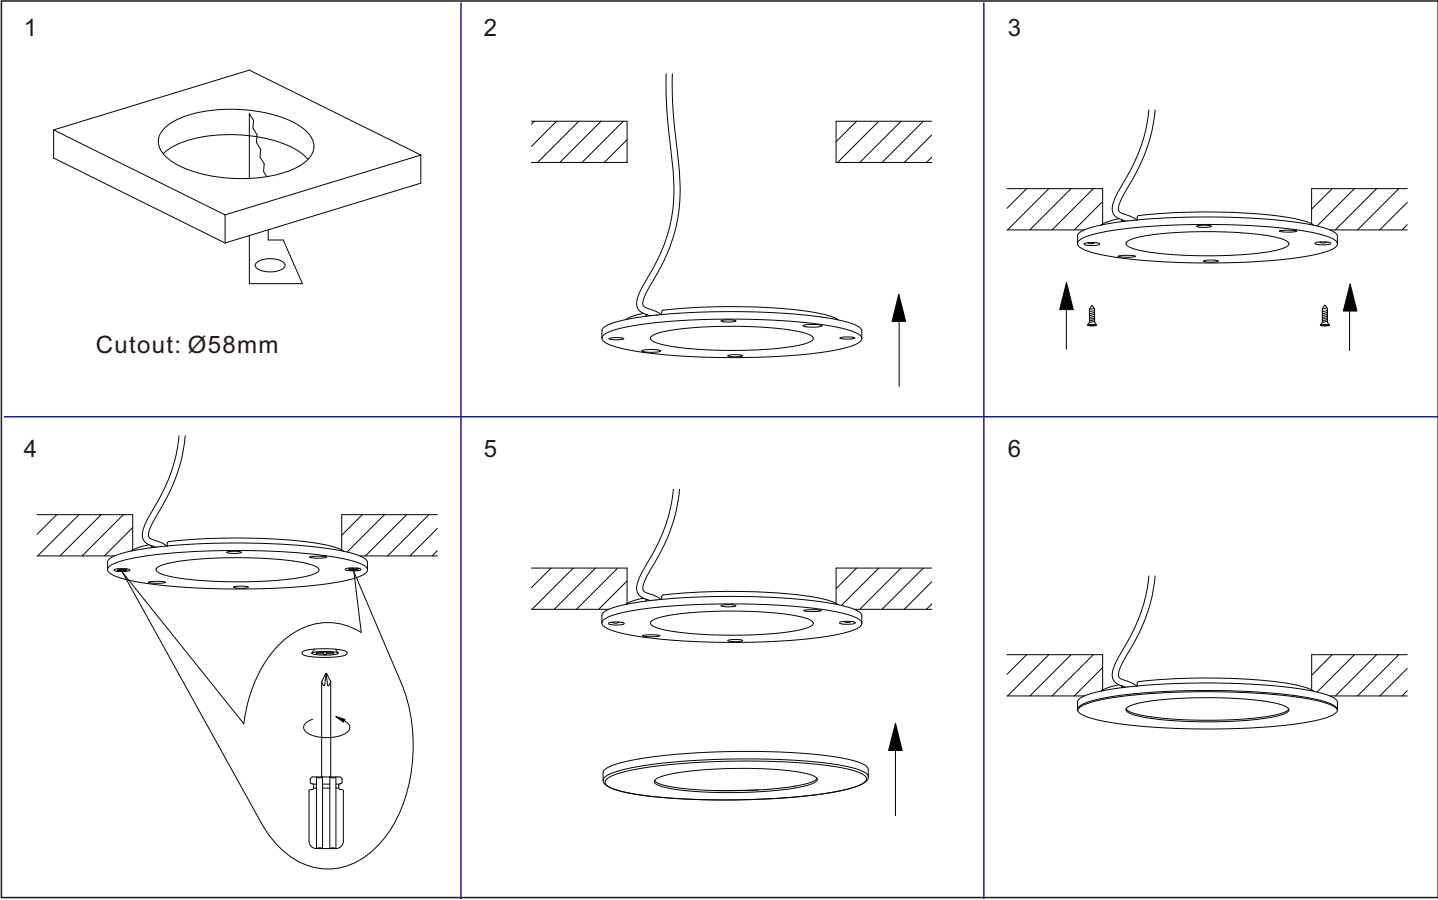

Surface Mouted

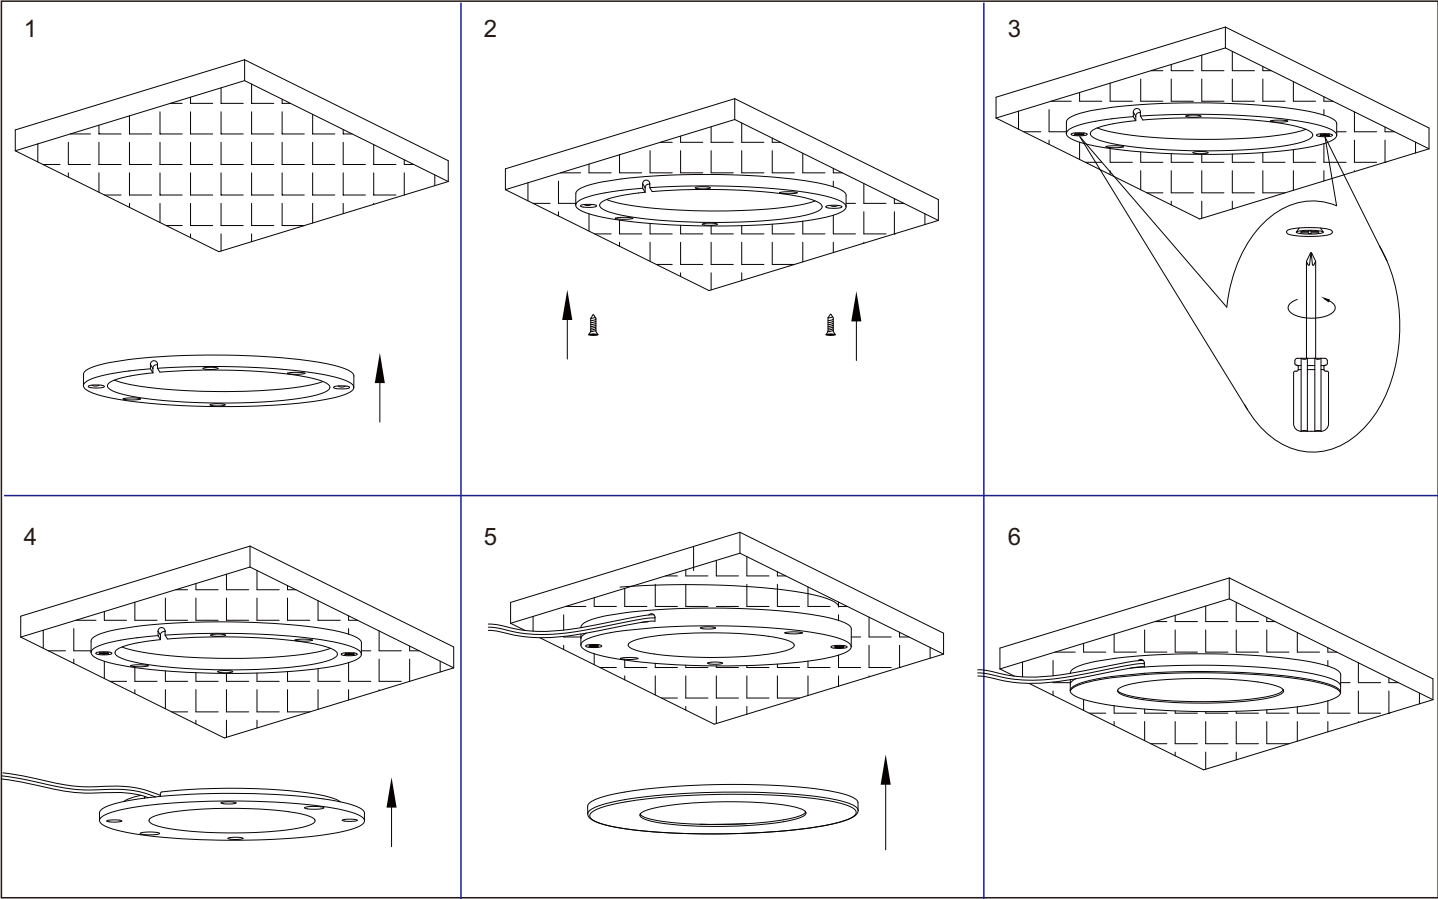

Packaging

Packaging Measurement	Master Carton
Unit per carton (pcs)	100
Dimension (cm)	40*40*15
CBM	0.024
Net Weight (kgs)	13
Gross Weight (kgs)	13.5
Cartons per 20' Container	1160

Goniophotometers System Test Report

