

Super slim design
MINI PANEL L

3001-CCT-SM



Parameters:

Optical Parameters:

CCT:	2800-3200K/4000-4500K/5000-6500K
Lumen output(lm)±5%:	360 LM@3000K
Lumen efficacy:	65 LM/W
LED Type / Qty:	SMD2835 / 56PCS
CRI:	>80

Electrical Parameters:


Rated Power(W)±5%:	6W
Rated / Actual Input:	AC 120V / 60Hz
Driver output Data:	120Vdc/ 35mA/ 4.2W
Power Factor / THD / PE:	>90% / <30 / 70%
Driver/Connection:	Driver Inside
Beam Angle:	120°
Over Load / Short Circuit:	Protection

Life:


Warranty:	5 years
Lumen Maintenance:	80,000hrs
LM80:	>97.1% lumen maintance@6000hrs

Others:

Dimmable Solution:	Triac (UL)
IP/IK/Glow-wire:	IP20
Operating Temp:	-20°C ~ +40°C
Storage Temp:	-40°C ~ +85°C
Frame Color RAL:	White / Black / Nickel

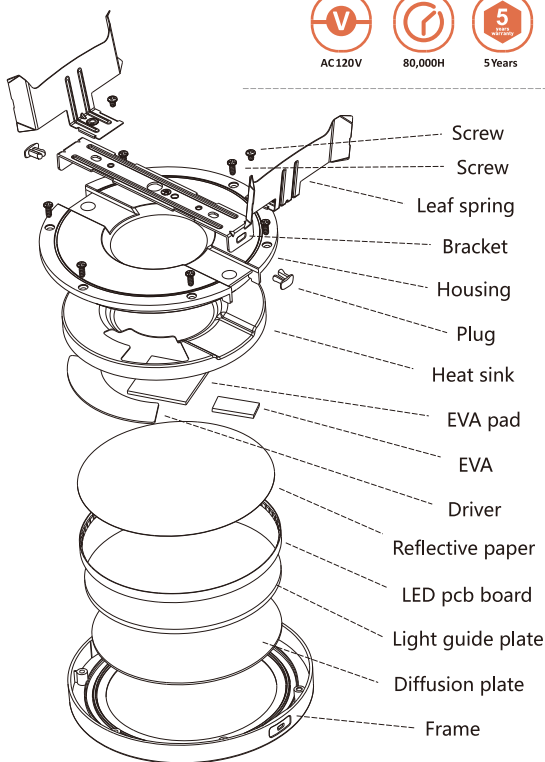


Dimension:

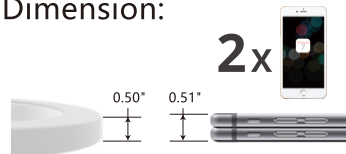


Φ5" x 0.5" mm




INSTALLATION METHOD

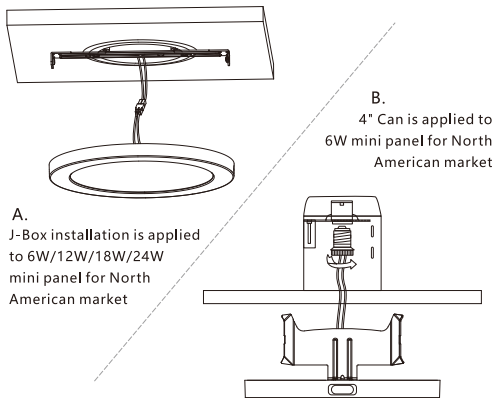

POLAR CUREVES WIDE DISTRIBUTION

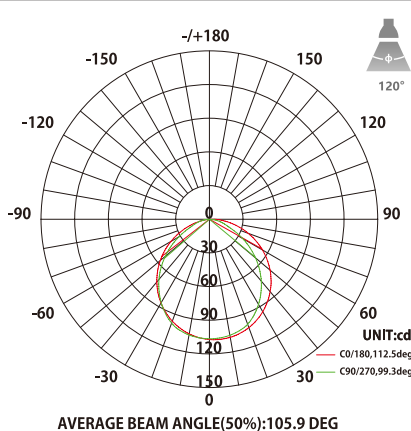

AVERAGE AND CENTER E FIGURE

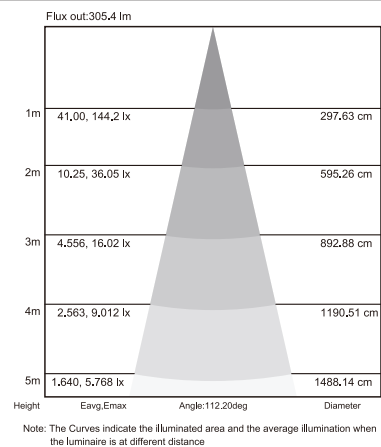

PACKAGE

