
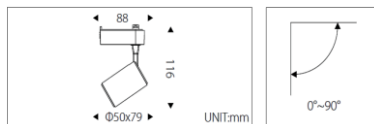




Model No.	4807-CCT-7W	Version	Date
		1	11/9/2018
	<div><div><3 SDCM</div><div>AC 220~240V 50/60Hz</div><div>15°</div><div>24°</div><div>2800K</div><div>CRI ≥97</div></div> <div></div>	Features 1. Compact design with outstanding lighting performance makes Leo-T as one of SAT's most popular series among others. 2. Surface-mounted installation method is optional for low power spacs. 3. Varied optic accessories are available for higher power spacs. 4. Its classic simple appearance makes Leo-T the ideal solution for accent lighting in business and exhibition spaces.	
	Specifications		Accessories
Light source	SMD 3030 7W	N/A	
Luminous flux (lm)	440 lm@3000K		
Color rendering index	≥80		
Color Temperature	3000K, 4000K, 5000K		
Fixture and Electrical Equipment		Applications	
Beam angle	30°		
Materia /Color	Aluminum / white, black	Hotels, stores, malls, etc	
Installation /Cut-out	Track light		
Adjusted	Horizontal 350° , vertical 90°		
Power / DC input	7W (200mA) ±10%		
Gear / PF	Built-in LED Driver / PF=0.5		
Input Voltage	AC 110V~240V 50/60Hz		
Storage Temperature	Temp: -20℃ ~ 40℃ Hum: 80%		
Control & Others	Non-dimmable		
Light Distribution Curve			
			
Remark :			
Net weight			
Gross weight			
Packing	Inner box: 125*125*70mm	Outer box: 520*440*265mm/48 pcs	