



User Instruction



IP Rate: IP65
RGB+CCT Smart LED Garden Light

Features



RGB+CCT
16 Millions of colors to choose



Color temperature
2700~6500K



Dimmable
Saturation control



2.4G RF wireless transmission
technology



Remote control
Control distance 30m



Smart phone App control
Mi-Light WiFi ibox is needed



Waterproof and dustproof
grade IP65




Beam Angle 15°
Illumination distance Greater than 10m



Made in China


Parameters

| Model No. | 1709-RGB/XX-24V | 1709-RGB/XX-120V |
|-----------------------|-----------------|---------------------|
| Input Voltage | DC 24V | AC86~265V / 50~60Hz |
| Power | 9W | 9W |
| Color temperature | 2700K~6500K | 2700K~6500K |
| Luminous Flux | 700LM | 700LM |
| Light Efficiency | 80LM/W | 80LM/W |
| CRI | >80 | >80 |
| PF | —— | >0.5 |
| Lifespan | 50000 hours | 50000 hours |
| Beam Angle | 15° | 15° |
| Illumination distance | >10m | >10m |
| IP Rate | IP65 | IP65 |
| Material | Aluminum | Aluminum |

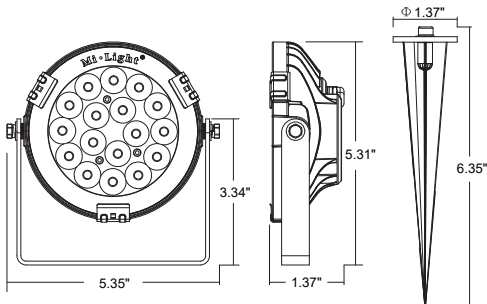


Auto-transmitting Diagram

One Garden Light can transmit the signals from the remote control to another Garden Light within 30m, as long as there is a Garden Light within 30m, the remote control distance can be limitless.

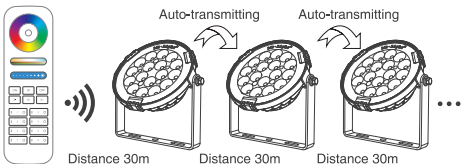


Auto-synchronization function

Different garden light can work synchronously when they are started at different times, controlled by the same remote, under same dynamic mode and with same speed, and within 30m distance.

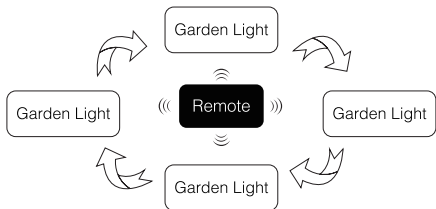


24V Connection diagram

Input Voltage DC 24V, don't need to distinguish polarity on the connection

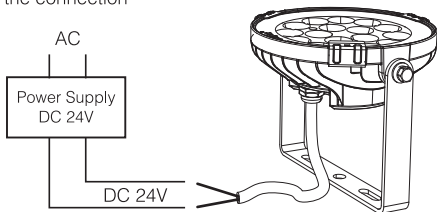


120V Connection diagram



Link/Unlink

Compatible with these remote controls (Purchased separately)

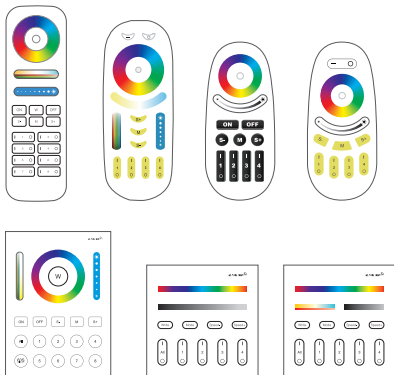

NOTE:

Lighting can be working after linking with remote;
for more details, read the remote instruction.

- Amateur do not dismantle and install the light
- Users must be correct, strict and solid to install the light; do not use the light on strenuous vibration area.
- The lighting will be heating on working, do not cover the lighting housing.