

Super Thin Recessed Round LED Panel Light (4 Inch)



Specifications:

Item No.:	3001-xx-120V
Power:	8W
Input Voltage:	AC110/120V (50/60Hz)
Power Factor:	>0.95
LED Type:	SMD2835 48PCS
Color Temperature:	2700K/3000K/4000K/5000K/6000K
CRI:	>Ra80
Lumen Flux:	720lm ± 5%
Beam angle:	120 Degree
Dimmable:	Yes
Lifespan:	>25,000H
Working Temperature	-20~50°C
Material:	Aluminum + PC Diffuser
Downlight Size:	Ø117*H10mm (D4.60xH0.40 inch)
Weight:	120g/pc (350g include driver box)

FEATURES

- IC-Rated
- Isolated driver inside junction box
- Aluminum heatsink / PC diffuser
- Perfect for limited space installation locations,
Only 0.4 Inch thickness
- Instant-on with no warm up time
- Free of harmful mercury, environment friendly
- 2700K to 6500K color temperature options available
- ETL/cETL approved
- RoHS compliant
- 3 years warranty

CAUTIONS

- Rated for indoor use only; do not use where exposed to weather
- Do not use other drivers
- Do not connect multiple fixtures to one driver

DRIVER


Driver type: Isolated constant current

Driver Input voltage: 110/120V AC

Input current: 70mA

Power Factor: 0.96

DIMENSION

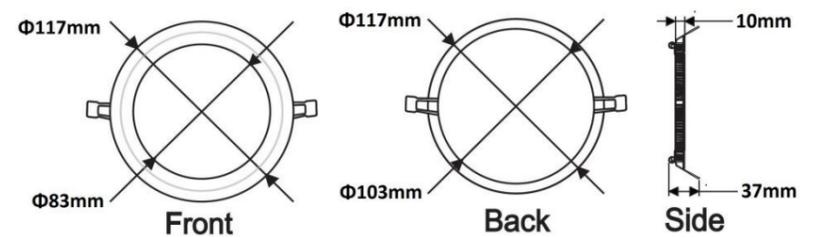

INSTALLATION

