

3020-CCT-SM

Super slim designed and belong to one of the most elegant led light.

MINI PANEL LIGHT / 1440LM / AC120V / 18W



Parameters:

Optical Parameters:

CCT:	2800-3200K/4000-4500K/5000-6500K
Lumen output(lm)±5%:	1440 LM@3000K
Lumen efficacy:	80 LM/W
LED Type / Qty:	SMD2835 / 112PCS
CRI:	>80

Electrical Parameters:


Rated Power(W)±5%:	18W
Rated / Actual Input:	AC 120V / 60Hz
Driver output Data:	120Vdc/ 105mA/ 12.6W
Power Factor / THD / PE:	>90% / <30 / 70%
Driver/Connection:	Driver Inside
Beam Angle:	120°
Over Load / Short Circuit:	Protection

Life:


Warranty:	5 years
Lumen Maintenance:	80,000hrs
LM80:	>97.1% lumen maintance@6000hrs

Others:

Dimmable Solution:	Triac (UL)
IP/IK/Glow-wire:	IP20
Operating Temp:	-20°C ~ +40°C
Storage Temp:	-40°C ~ +85°C
Frame Color RAL:	White / Black / Nickel

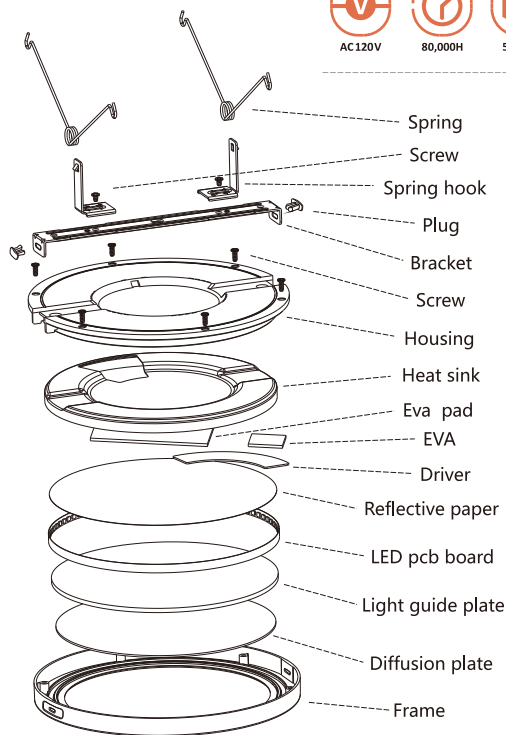


Dimension:

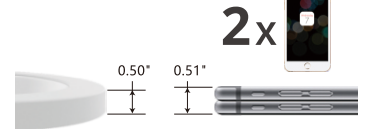

Φ9" x 0.5" mm




INSTALLATION METHOD

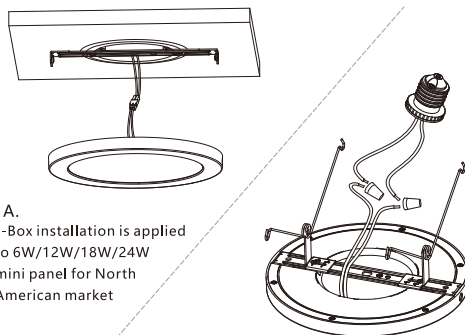


A.
J-Box installation is applied to 6W/12W/18W/24W mini panel for North American market

B.
5/6" Can is applied to 12W/18W/24W mini panel for North American market

POLAR CUREVES WIDE DISTRIBUTION

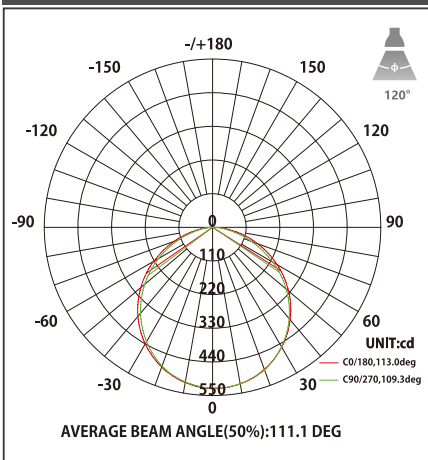


AVERAGE AND CENTER E FIGURE

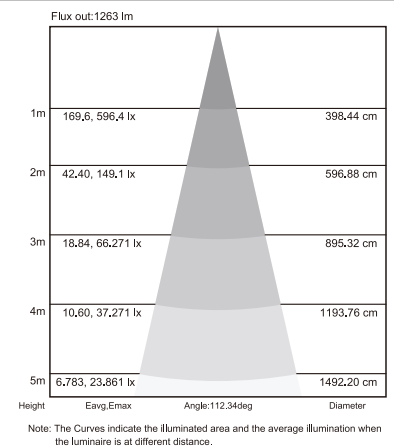

PACKAGE

L 9"
W 9"
H 0.7"



N.W.: xxx kg
G.W.: xxx kg