



Specifications



Model: _____ 100W LED Flood light Series

Product Code: _____ 2010-100W-DOB


Color: _____ 5000K

Operating Voltage: _____ 100-277 VAC 50/60Hz

Picture of real products



Dimension (mm)

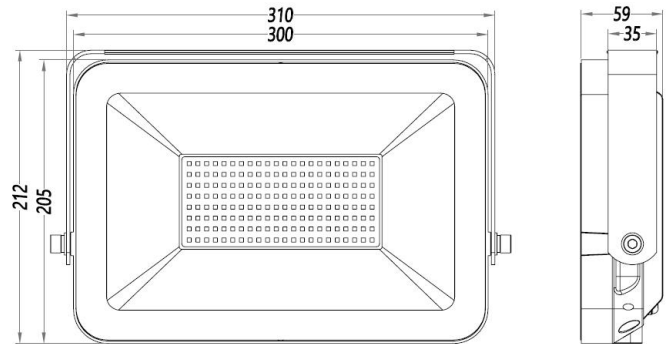

●Features

Item	Parameter range
Power	100W
LED Quantity	PHILIPS 3030 SMD
Color	Cool white
CCT	5000K
CRI	≥75
Life-span	≥50,000 Hours
Flux	12,000LM +/- 10%
Beam Angle	120°
Material	Aluminum + Toughened glass
Net Weight	2.3KG/PC
Gross Weight	2.48KG/PC
Inner box Dimension	36.5*11.2*26.5 CM
Outer carton Dimension	70*38.5*29 CM
Package Spec.	6PCS/CTN, 15.4KG/CTN



●Technical request

item	units	Parameter range
working environment	℃	-37℃ - 55℃
Working Humidity		≤95%
storage condition	℃	-40℃~80℃
limited voltage	V	100-277VAC 50/60Hz
Input current	A	0.36-1
Protection Level	IP65(outdoor using)	

●Features

Integrated applications of LED light source, the unique circuit control design, reached a high efficiency and energy saving of more than 80%.

Ultra-high brightness, high color-rendering index, is the latest type of outdoor lighting products, long life ($\geq 50,000$ hours).

●Applications

It is mainly used for outdoor flood lighting, building decoration lighting, industrial lighting, advertising lighting, road lighting, factory lighting, or other outdoor & indoor lightings.

●Attentions

1. Please use the correct voltage.
2. Please read the product installation manual carefully before using the products.