



2512 - 2530 IP65 Outdoor LED lighting system

Light control function

SPECIFICATIONS





Product Features

- *cETLus certification
- *50.000hours lifetime,3year warranty
- *Available with up&down up only and down only
- *Sealed fixture is IP65,dirt and bug free.
- *Designed with the look of traditional wall fixture.
- *Architectural UV resistant powder coat finish
- *Available with dusk to dawn sensor

Benefits

- *Give your outdoor spaces a bright modern look with this contemporary outdoor wall light fixture.
- *The seek style shines light upward or downwards for atmospheric ambient light as well as useful illumination along walk ways.
- *The Cylinder design is constructed from solid aluminum and features a bronze finish with an tempered glass lens.



Application

- Outdoor wall
- Hotel
- Park
- Corridor Etc



Product main advartages

- *ETL Approved for many wattage
- *3Years warranty time
- *IP65 waterproof grade for outdoor using. Not only use the waterproof built-in driver for double protection, but also use the silicone glue to sealed.
- *Stronger die-cast aluminum body color according to the color of the building: silverdiamond silver, brown and black.
- *Good quality Epistar LED chip.
- *Colorful and beautiful: cool white, warm white, red, yellow, green, blue, pink and RGB(with contoller)

Integrated Design




Data Sheet


Item No.	Power	CCT	Dimensions	Lumens	Voltage	IP Rated	Certification
2512-30K	2*12W	3000K	Φ4.25"*11.8"	1920 lm	100-277Vac	IP65	ETL,cETL
2512-40K	2*12W	4000K	Φ4.25"*11.8"	2160 lm	100-277Vac	IP65	ETL,cETL
2512-50K	2*12W	5000K	Φ4.25"*11.8"	2160 lm	100-277Vac	IP65	ETL,cETL
2530-30K	2*30W	3000K	Φ6.3"*11.8"	4800 lm	100-277Vac	IP65	ETL,cETL
2530-40K	2*30W	4000K	Φ6.3"*11.8"	5400 lm	100-277Vac	IP65	ETL,cETL
2530-50K	2*30W	5000K	Φ6.3"*11.8"	5400 lm	100-277Vac	IP65	ETL,cETL

Fixed Installation


- ① Drill 4 holes on the mounting surface according to the sizes shown on the above figure

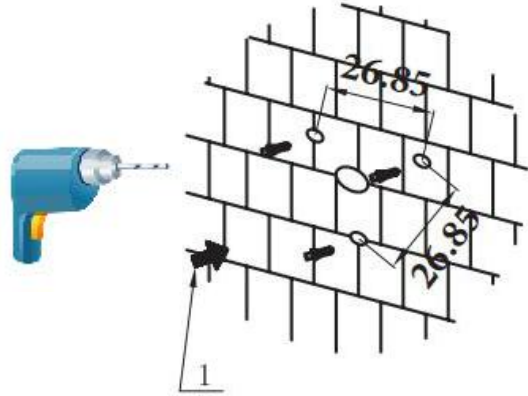


- ② Fix the mounting bracket on the mounting face with 4PCS self-tapping screws

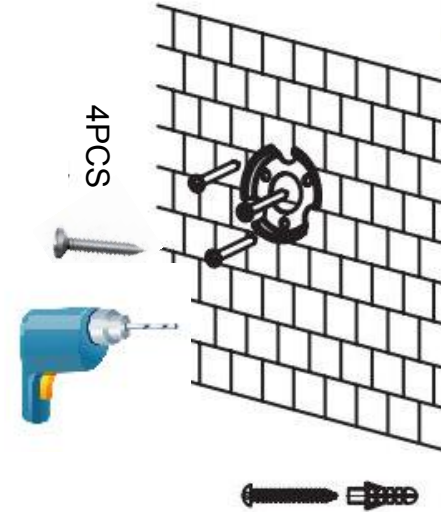




- ③ Connect the lamp input cable and the power cable

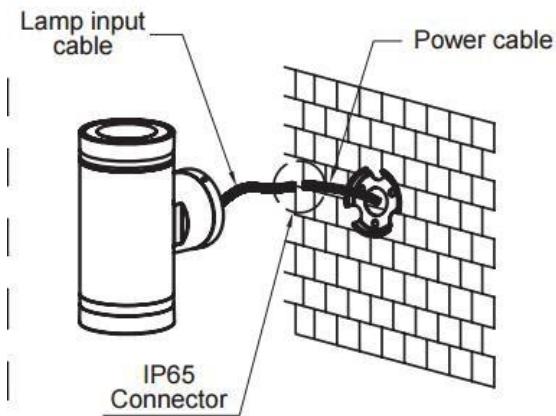

- ④ Fix the lamp onto mounting bracket
Tighten the 4PCS screws to fix the lamp housing onto the installation surface

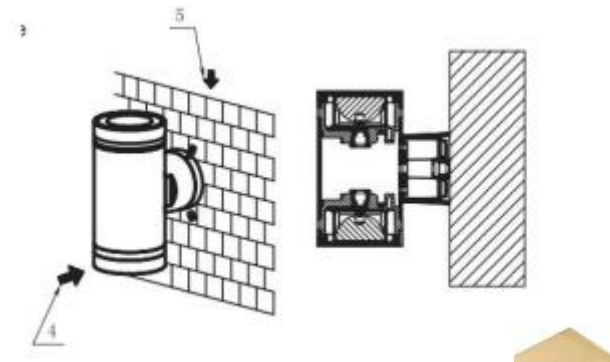

Accessories

Part Name	Picture	Number	Application
Standard Cover		1PCS	Fixed Wallpack
Standard Cover		1PCS	Fixed Wallpack
EVA rubber pad		1PCS	Waterproofing

