

# Total Solution of Direct Replacement of 120W

## LED CEILING LIGHT




15W=120W ALU

### Product feature

- ◆ Adopting GENUINE NICHIA LED, lumens of natural white up to 1160Lm, and of warm white up to 1000Lm.
- ◆ High CRI 85 or 95 Ra makes colors look vibrant and especially rich.
- ◆ Full range color temperature 2400K, 2700K, 3000K, 4000K, 5000K for wide selection.
- ◆ External driver with 100-240VAC multi-voltage input.
- ◆ Widely replacement for halogen lamps.
- ◆ Housing rotatable with angle of 30°

Model Number	Power Consumption	LED	CRI	Efficiency (lm/W)	Color Temperature	Beam Angle	Input Voltage	PFC	Light Intensity	Lumens	Dimmable
4625-WWW-WS 4625-WW-WS	15W	NICHIA	85/95	67	2700±200K 3000±200K	38°	100-240VAC	>0.9	1550 cd	1000lm	NO
4625-NW-WS 4625-NCW-WS	15W	NICHIA	85/95	77	4000±200K 5000±200K	38°	100-240VAC	>0.9	1840 cd	1160lm	NO

Note: CRI 95 LED also available with same price, lumens is around 15% lower than the one of CRI 85 LED.

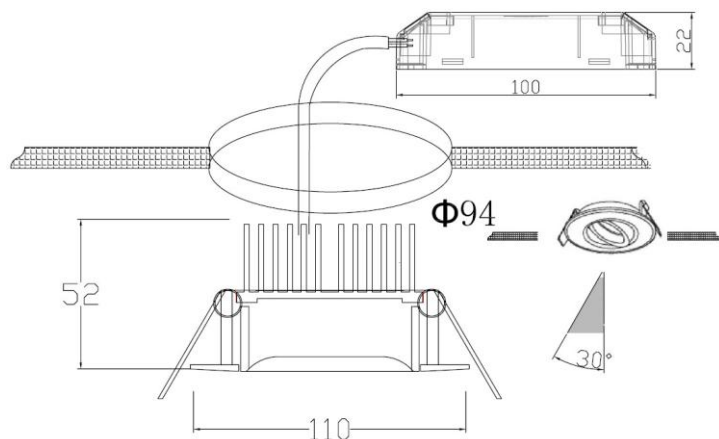

### Application

- Area: Indoor use only.
- Purpose: Accent lighting, local lighting.
- BAR/Restaurant
- General lighting
- Store
- Hotel
- Art gallery
- Hall / Lobby
- Museum
- Jewelry store
- School
- Theater

# LED CEILING LIGHT

## General characteristics



Model Number	Product name	Material	Driver	IP Rating	Dimension (mm)	Net Weight	Lifetime (hr)	Working Temperature
4622-WW-WS	LED ceiling light	Aluminum	External	IP40	Φ110×52	380g	40000	-5℃~+35℃
4622-CW-WS	LED ceiling light	Aluminum	External	IP40	Φ110×52	380g	40000	-5℃~+35℃

## Packaging information

Packing: 40 PCS / carton		
Box	118×118×87(mm)	446 g
Carton	62×39×27(cm)	19.6 kg





**4622-WW-WS 38°**

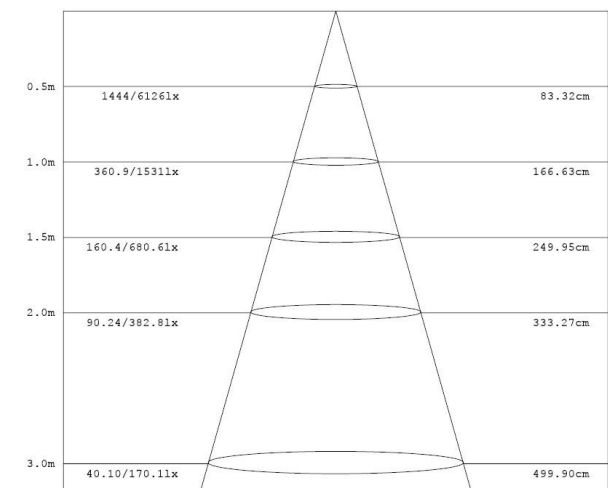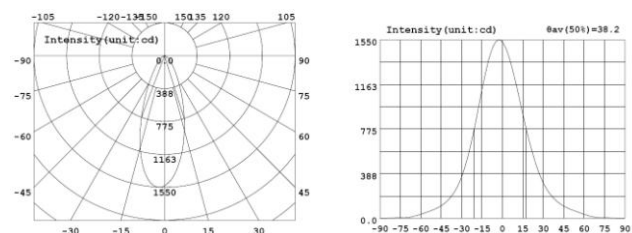

Height Lux Diameter



**4622-NW-WS 38°**

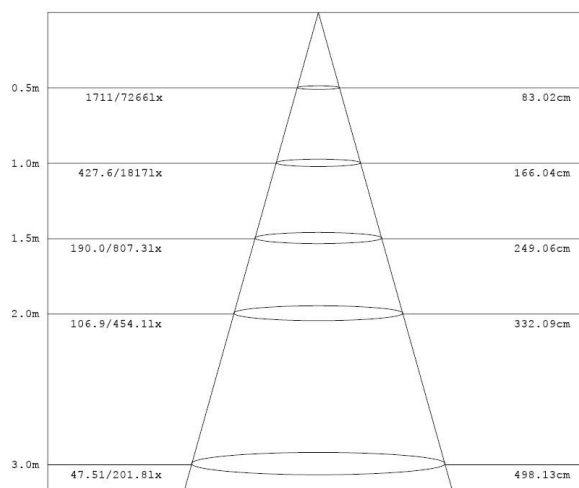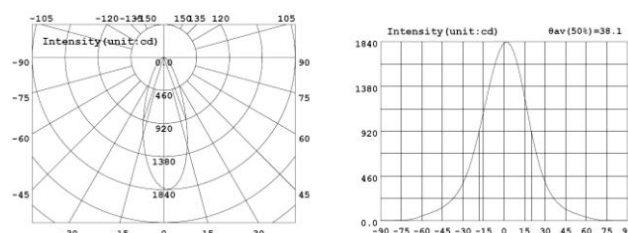

Height Lux Diameter

# LED CEILING LIGHT

## Installation Instruction

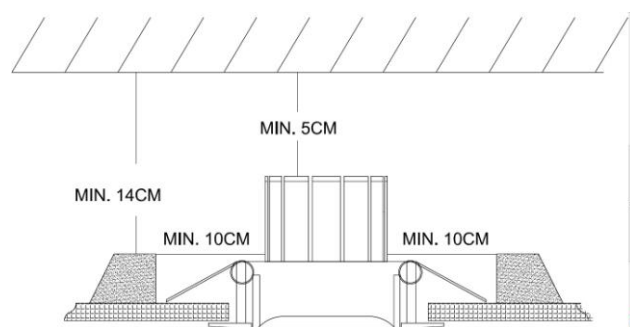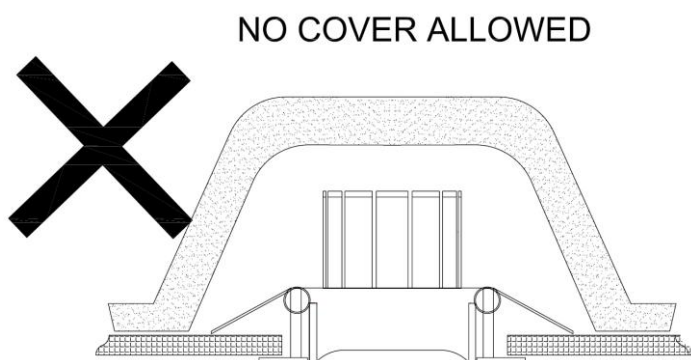

### Important Caution

1. Not suitable for high temperature and moisture area.
2. Not suitable for heavy air-polluted area.
3. Not suitable for close system fixture.