

Specification



Product	3W High Power Edge-lit LED Module
Model No.	5030-CW


Features

- ◎ Adopts high brightness LED as light source;
- ◎ Aluminium pcb, ABS shell;
- ◎ 6X45° beam angle designed for side light;
- ◎ Constant current circuit design, for more stable performance;
- ◎ Low power consumption, even light, high color index, energy-saving, easy installation;
- ◎ Professional thermal management;
- ◎ No UV or IR radiation;
- ◎ Appropriate for double-sided light boxes with depth over 20cm;
- ◎ CE, ROHS, UL Listed.


Parameter

Item No.	5030-CW
Voltage	12V DC
Color	6500K
LED Source	1pc SMD2835
Power	3W/pc
Luminous flux	220LM/PCS
Size	49*31*14mm
Beam Angle	6*45°
CRI	>80
IP Rated	IP65
String Qty	20pcs
Cutting	Every single module cuttable
Lifespan	50,000h
Operating Temperature	-25° C ~ +45° C
Storage Temperature	-30° C ~ +80° C
Certificate	UL/CE/RoHS


Dimension (unit:mm)

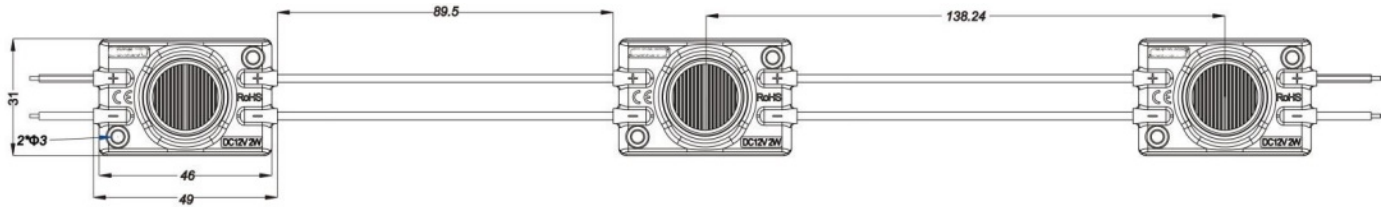

Connection

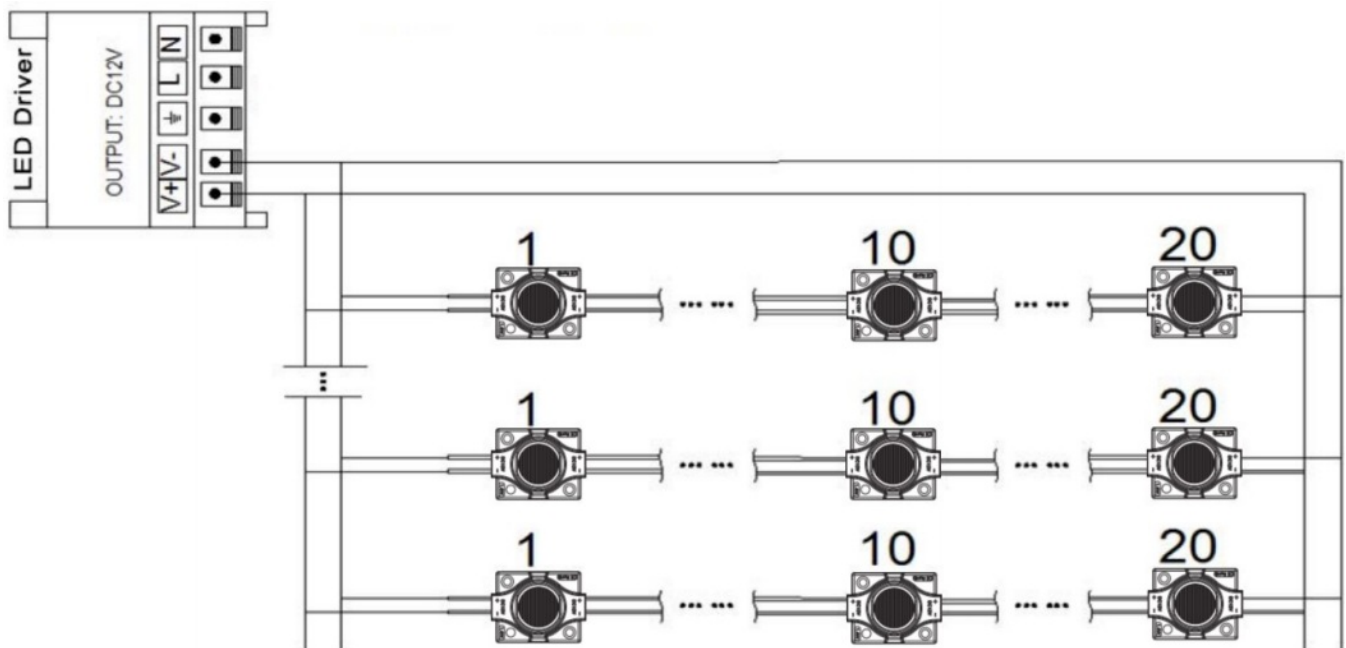

Installation and precautions :

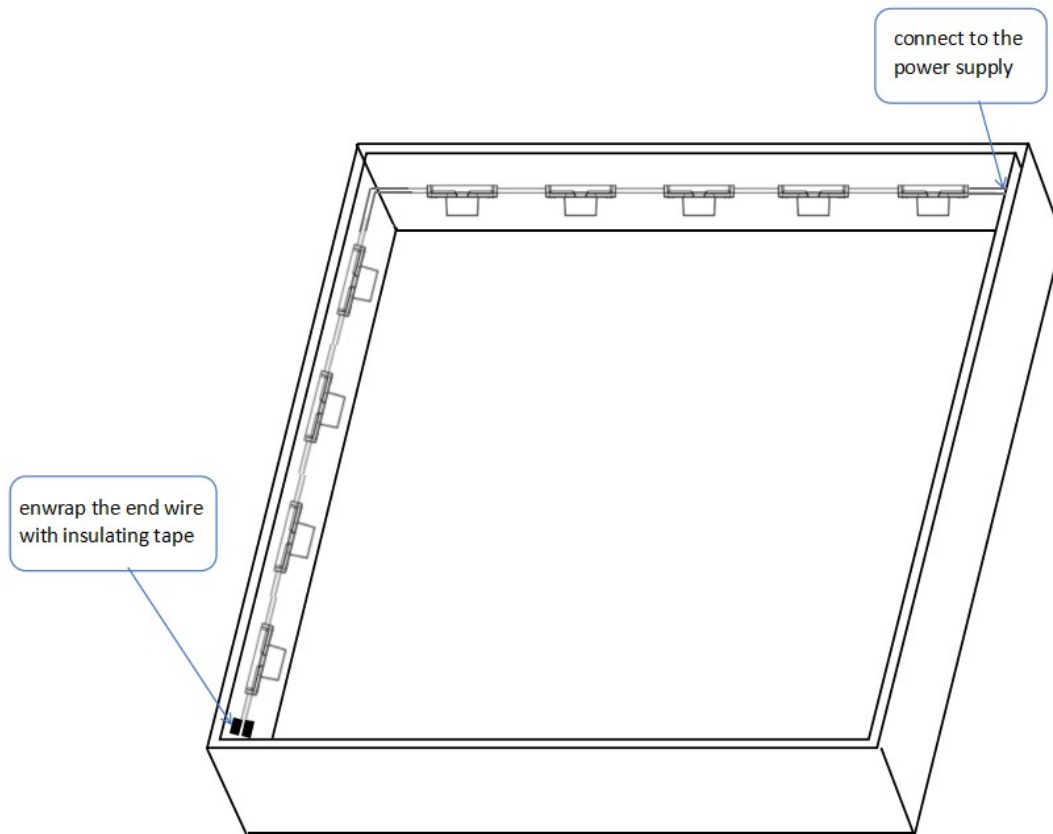

- Better be fixed to materials with good heat sink like Iron, Aluminum and so on
- Power off before replacement
- Outdoor use and indoor use are available
- Consult competent electricians for technical support