



Lighting technical data

LED LAMP DIMMABLE LONG PAR30

Lighting technical data

**LED PAR30 is an alternative light source
with longer life and uniformed light distribution**



LED LAMP PAR30



Line-Up

Model No.	Watts(W)	Light Output(lm)	Dimension(mm)	Light Color(K)	Beam Angle(Degree)
1332-65K	14±10%	1010-10%	95.25*112.5	6500K	30
1332-30K		910-10%	95.25*112.5	3000K	30

Technical Specifications

Item	Test Conditions	Min.	Typ.	Max.
Input Voltage(V, rms)	AC	110	120	132
Input Current(mA, rms)	AC(120V)	---	117	---
Input Power(W, rms)	AC(All)	---	14	---
Input Frequency(Hz)	AC	---	60Hz	---
Power Factor(PF)	AC(All)	≥0.95		
Output Voltage(V)	DC	36	37.8	39.6
Output Current(mA)	DC	290	300	310
Output Power(W)	DC	10.44	11.34	12.276


Environmental Requirements

Specifications	Values
Operational Temperature Range	-20~40℃
Preservation Temperature Range	-20~90℃
Operational Humidity Range	95%Rh or below (@-20~40℃)
Installation Area	Indoor (Counter,Residential,Commercial,etc)

LED LAMP PAR30



Drawing

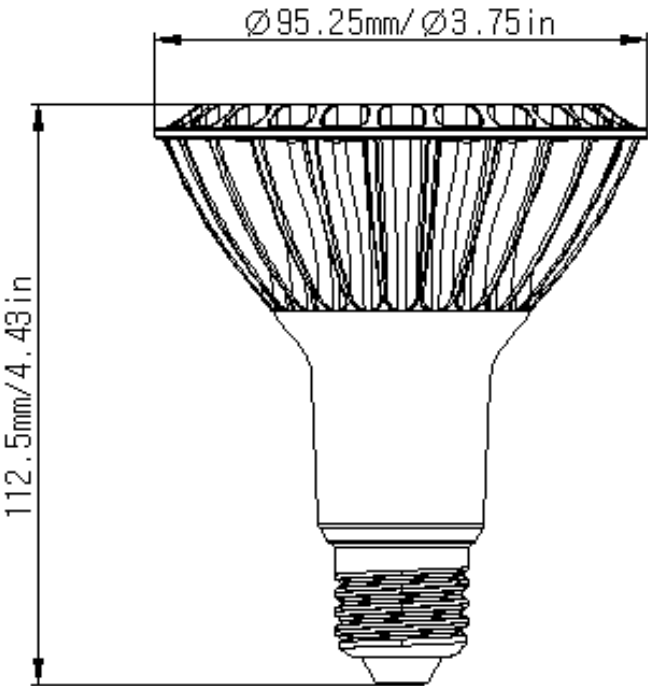

Material/IP	IP
ADC12	20
PC	


LED LAMP PAR30




1332-65K

Category	Specifications	Unit
Watts	14	W
Lumens per Watt(Efficacy)	72	Lm/W
Light Output	1010	lm
Light Color(CCT)	6500	K
Beam Angle	30	°(degree)
Color Accuracy(CRI)	80	Ra
Product Weight	250	G
Rating Life	35000	H
Base	E26	
Input Voltage(AC)	120	V

Luminance Intensity Distribution

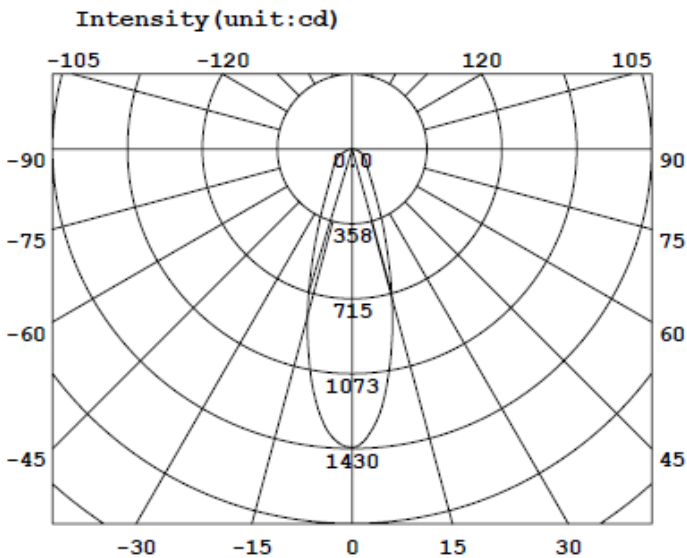

Cone Lux Diagram

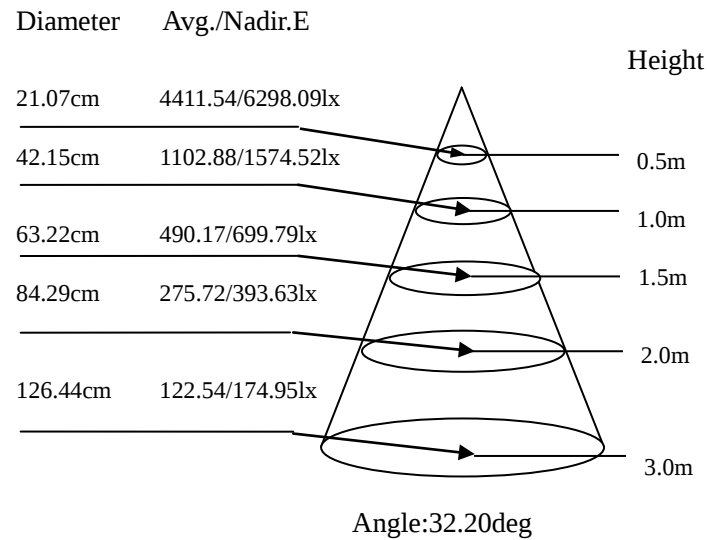


LED LAMP PAR30



1332-30K

Category	Specifications	Unit
Watts	14	W
Lumens per Watt(Efficacy)	65	Lm/W
Light Output	910	lm
Light Color(CCT)	3000	K
Beam Angle	30	°(degree)
Color Accuracy(CRI)	80	Ra
Product Weight	250	G
Rating Life	35000	H
Base	E26	
Input Voltage(AC)	120	V

Luminance Intensity Distribution

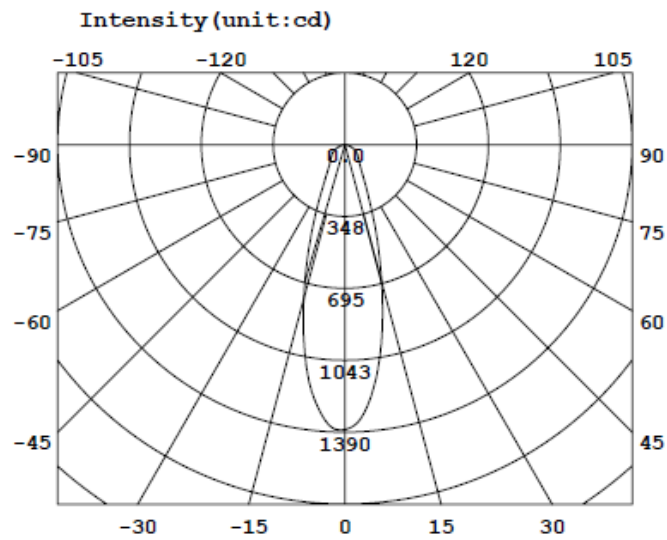

Cone Lux Diagram

