



2506 IP52 Semi-outdoor LED lighting system
2*6W (12W) Square Up and Down Wall Light

SPECIFICATION



Features:


- Semi outdoor use.
- Die-casting aluminum fixture and heatsink inside for heat management.
- High quality Epistar brand LED Chip used. 1W per LED.
- Built-in waterproof driver, black silicone glue and tempered glass cover for waterproof.
- Double sides lighting.
- Optical lens on LEDs.

Application:

Hotel, park, corridor, houses etc.




Structure:

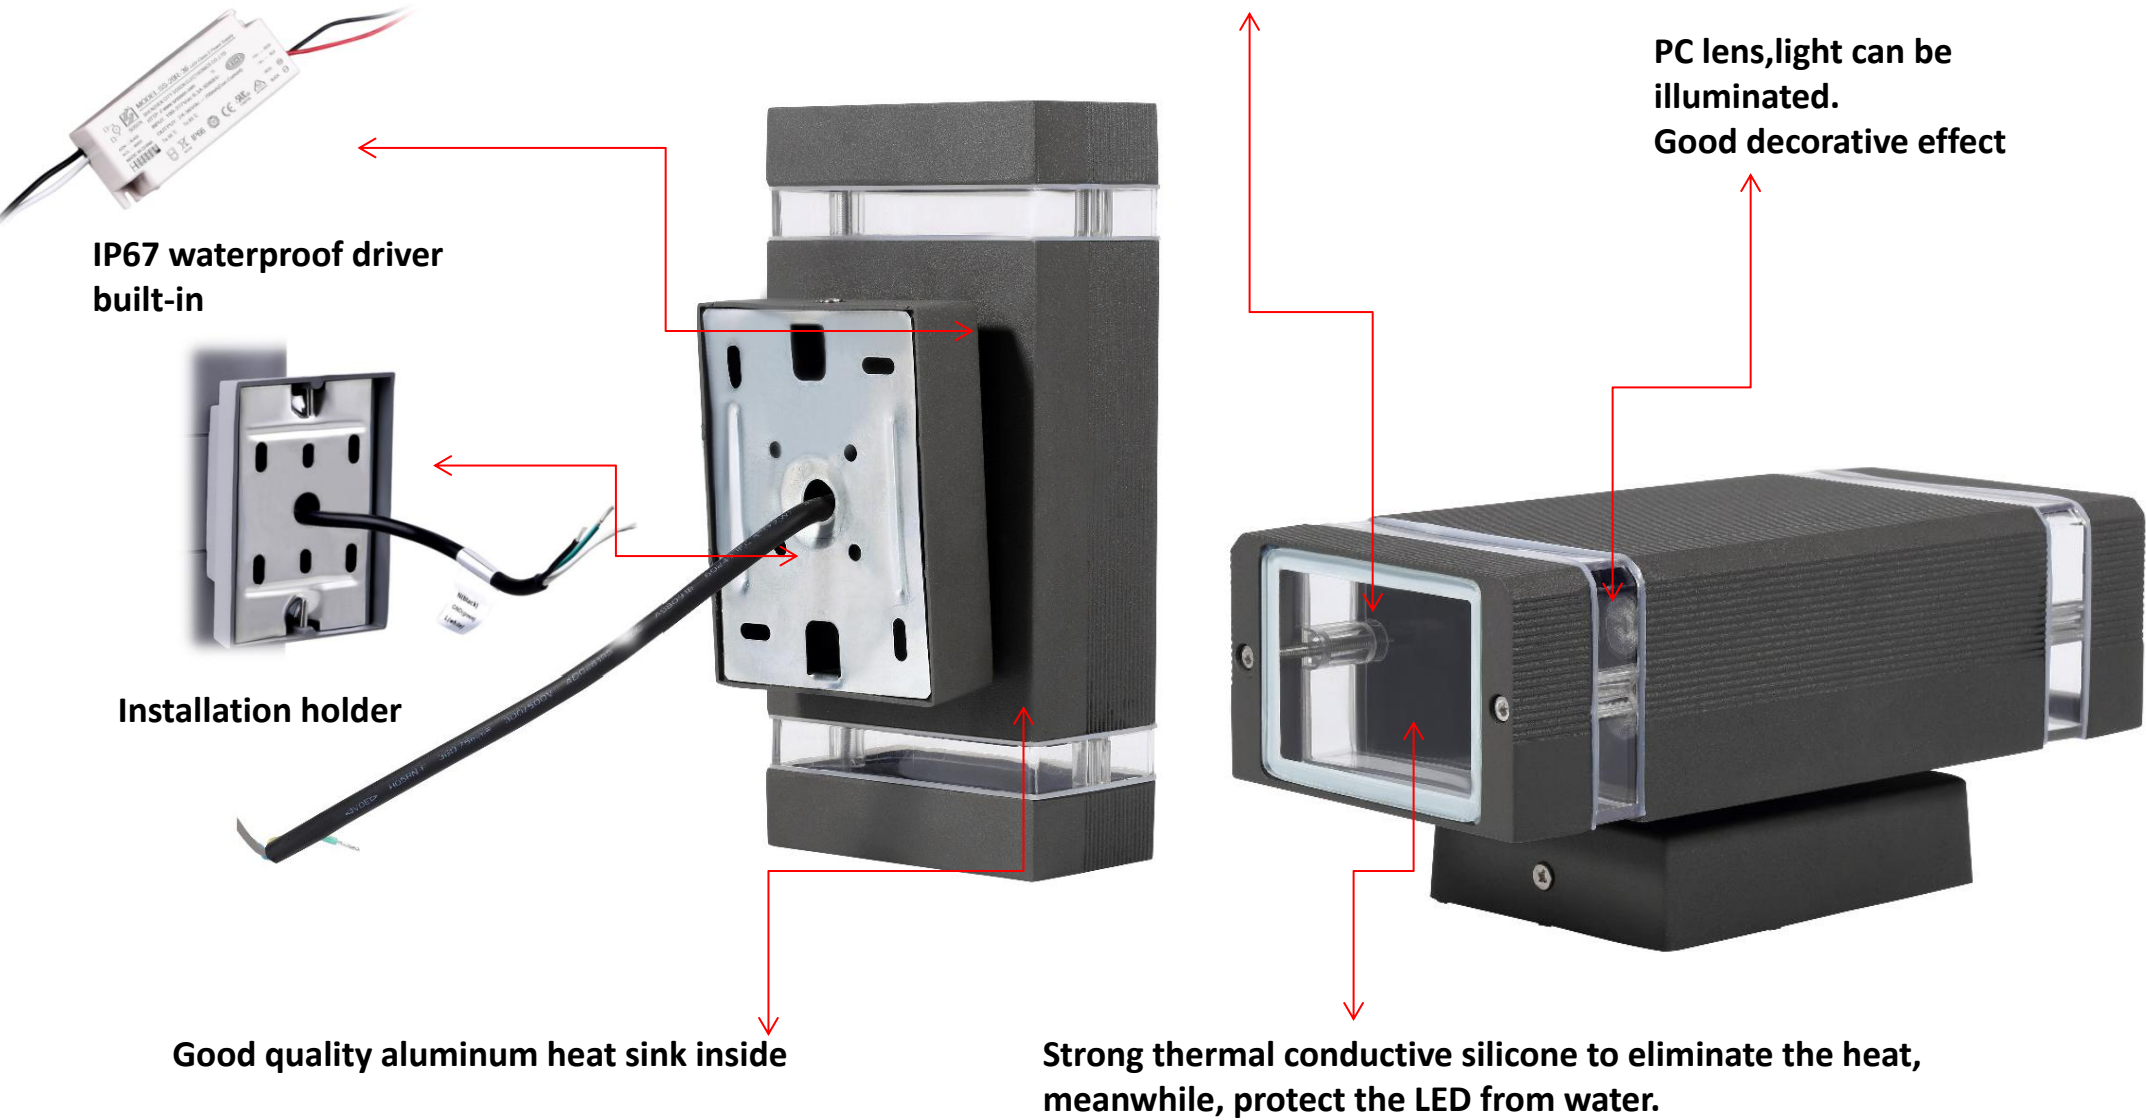

Parameters:

Power (Up & Down, Two Sided Lighting)	2*6W(12W in total)
Lumens	960 lm
Input Voltage	100-277Vac,50/60HZ
Input Voltage	100-277Vac,50/60HZ
Finish Color	Bronze
Beam Angle	30°
Driver	Built-in waterproof driver
Power Factor	>0.95
Material	Die-casting Aluminum body, tempered glass cover, and aluminum heat sink
IP Grade	Semi-outdoor
Warranty	3 Years


Dimension:(Unit:mm)

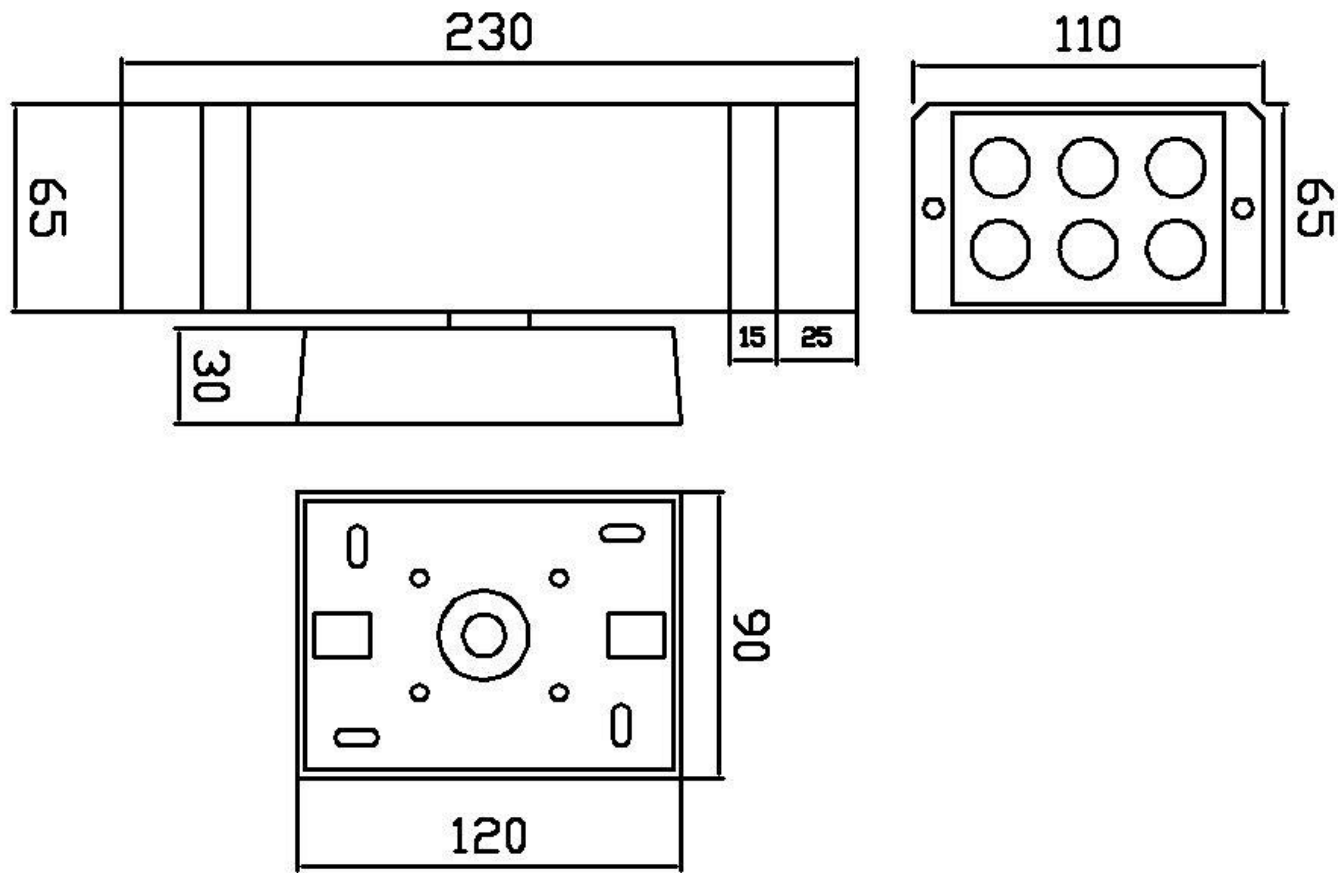


2*6W(Total 12W)

Installation Way :


Step 1: Loosen 2 screws on the fixture, remove the ① installation bracket from the fixture. Get the wires on the fixture through the installation bracket.

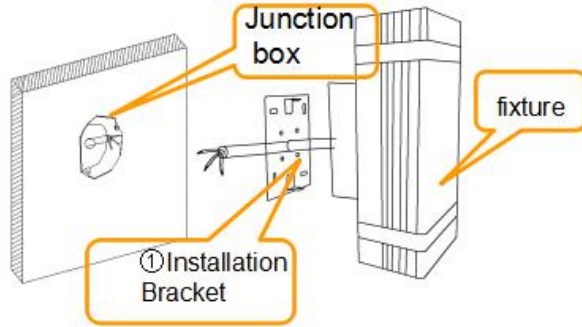


Step 2: Make connection to main wire inside the junction with insulating wiring caps(not supplied). Black wire connected to line, white wire connected to Neutral, Green wire to ground.

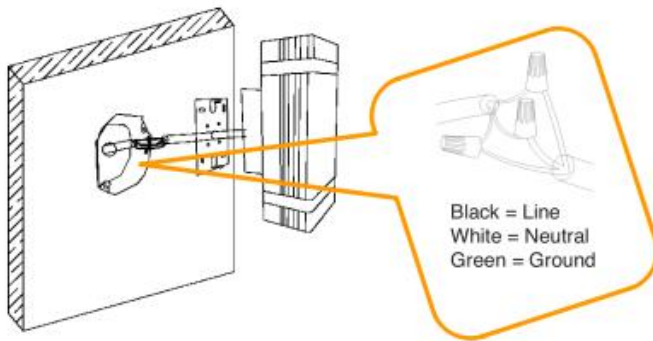

Step 3: Use screws (not supplied) to fix the installation bracket onto the junction box.

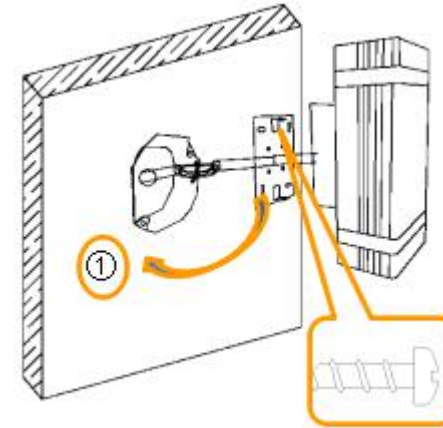

Step 4: Use (2) screws to fix the fixture on the installation bracket. After finish all the installation of fixtures, turn on the power.

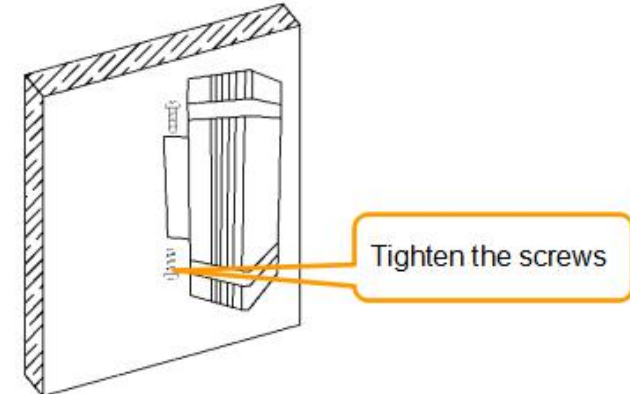

Packing:

①



②



Inner Pack	1PCS/inner box
Outer Pack	20PCS/carton
Carton Size (L*W*H cm)	50cm*56cm*24cm
G.W.	11KGS/carton

Other Options:

